


Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbpzpanzc								L - Length mm
5		●	●						5
6	●	●	●	● ●					6
8		●	●	● ●	● ●	● ●			8
10		●	●	● ●	● ●	● ●	●		10
12		●	●	● ●	● ●	● ●	●	●	12
14			●	● ●	●	● ●	●		14
16			●	● ●	●	● ●	● ●	●	16
18			●	●	●	● ●	●		18
20				● ●	●	● ●	● ●	●	20
25				● ●	●	● ●	● ●	●	25
30				● ●	●	●	●	●	30
35							●	●	35
40						●			40
-									-
-									-
-									-
-									-

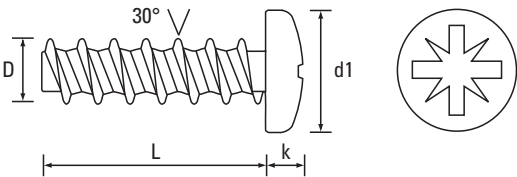

Steel / Zinc Plated (CR3) - preferred and available from stock.




Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPZPAN30008ZC
PSBPZPAN40010ZN


PRODUCT DESCRIPTION EXAMPLE

3 x 8 Cross Recess (Z) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
4 x 10 Cross Recess (Z) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

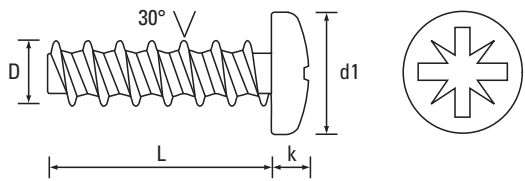Screws for Plastics		Plas-Tech® 30° Screws								Thread Forming Screws for Plastic Applications											
		Cross Recess (Z) Pan								A2 Stainless Steel											
ISO & DIN 7500 Tap-Fix® Screws		Machine Screws		Self-Tapping Screws		Self-Drilling Screws		Micro Diameter Screws		Hammer Drive Screws		K-Series® Setznuttern		Rivet Bushes		Self-Clinching Fasteners		CD Weld Studs		Brass Inserts for Plastics	
																					
Dia. D		1.8		2.2		2.5		3		3.5		4		5		6		Dia. D			
Dia. Gauge		-		-		-		-		-		-		-		-		Dia. Gauge			
d1 - max		3.20		3.90		4.40		5.30		6.10		7.00		8.80		10.50		d1 - max			
k		1.20		1.50		1.70		2.00		2.50		2.70		3.40		4.00		k			
s - A/F		-		-		-		-		-		-		-		-		s - A/F			
Recess		0		1		1		1		2		2		2		3		Recess			
L - Length mm		 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbpzpana2														L - Length mm					
5				●														5			
6				●		●		●										6			
8				●		●		●		●		●						8			
10								●		●		●						10			
12								●		●		●		●				12			
14								●		●		●						14			
16								●		●		●		●				16			
18								●		●		●						18			
20								●		●		●		●				20			
25										●		●						25			
30																		30			
35																		35			
40																		40			
-																		-			
-																		-			
-																		-			
-																		-			
A2 Stainless Steel - preferred and available from stock.																					
PRODUCT CODE EXAMPLE		PRODUCT DESCRIPTION EXAMPLE																			
SSPSBPZPAN35012A2		3.5 x 12 Cross Recess (Z) Pan Plas-Tech® 30° Screw A2 Stainless Steel																			
02		E. & O. E. Plas-Tech® is a registered trademark of Lancaster Fastener Co Ltd. © 2026, Lancaster Fastener Co Ltd. All images are copyright protected.																			

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

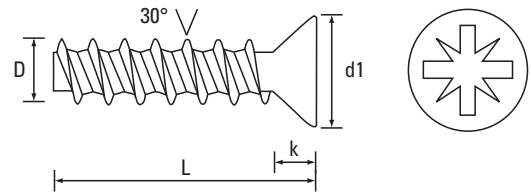

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbpzcskzc								L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●	● ●	●			8
10		●	●	● ●	●	●	●		10
12			●	● ●	●	● ●	●	●	12
14			●	● ●	●	●	●		14
16			●	●	●	● ●	●	●	16
18			●	●		●	●		18
20				●	●	●	● ●	●	20
25				●	●	●	●	● ●	25
30						●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPZCSK40020ZC
PSBPZCSK30010ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 20 Cross Recess (Z) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 10 Cross Recess (Z) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

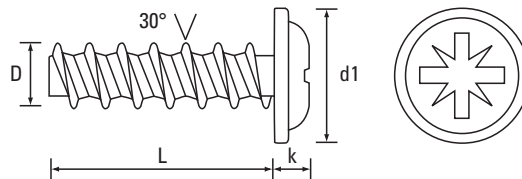

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbpzflnzc								L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	●	●	● ●			8
10		●	●	● ●	●	● ●			10
12			●	●	●	●	●	● ●	12
14				●	●	●	●		14
16				●	●	● ●	●	●	16
18						● ●	●		18
20				●	●	●	●	●	20
25					●	●	●	●	25
30						●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPZFLN40008ZC
PSBPZFLN30006ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 8 Cross Recess (Z) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 6 Cross Recess (Z) Flange Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (H) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

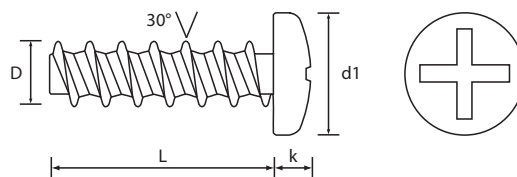

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbphpanzc								L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●		●			8
10		●	●	● ●	●	● ●	●		10
12			●	● ●	●	●	●	●	12
14			●	●	●	●	●		14
16			●	●	●	●	●	●	16
18			●	●	●		●		18
20				●	●	● ●	●	●	20
25				●	●	●	●	●	25
30				●	●	●	●		30
35							● ●		35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPHPAN30008ZC
PSBPHPAN30012ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 8 Cross Recess (H) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 12 Cross Recess (H) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

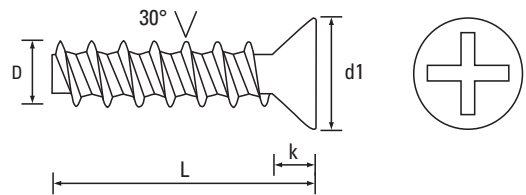

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbphcskzc								L - Length mm
5		●							5
6		●	●	●					6
8		●	●	● ●					8
10				● ●	●	●			10
12				● ●	●	●	●	●	12
14					● ●	●	●		14
16				● ●		●	●		16
18							●		18
20				●				●	20
25						●			25
30									30
35									35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPHCSK40016ZC
PSBPHCSK30010ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 16 Cross Recess (H) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 10 Cross Recess (H) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (H) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

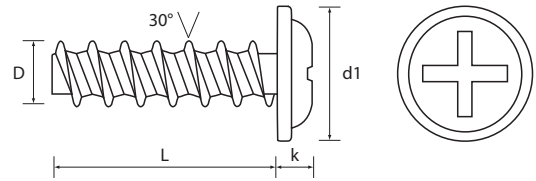

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbphflnzc								L - Length mm
5		●	●						5
6		●		●					6
8			●	● ●	●	●			8
10			●	● ●	●	●			10
12			●	●	●	● ●		●	12
14				● ●	●	●	●		14
16				●	●	●	●	●	16
18							●		18
20					●	●		●	20
25					●			●	25
30						●			30
35									35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.




Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPHFLN40008ZC
PSBPHFLN30014ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 8 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 14 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Black (CR3)

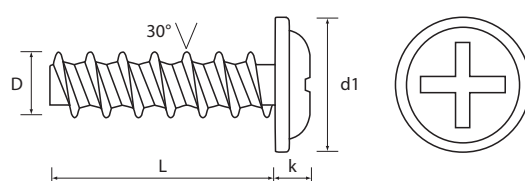Screws for Plastics	Plas-Tech® 30° Screws								Thread Forming Screws for Plastic Applications																																																																																																																																																																										
	Cross Recess (H) Flange								A2 Stainless Steel																																																																																																																																																																										
ISO & DIN 7500 Tap-Fix® Screws	 																																																																																																																																																																																		
Machine Screws																																																																																																																																																																																			
Self-Tapping Screws	<table><tr><th>Dia. D</th><th>1.8</th><th>2.2</th><th>2.5</th><th>3</th><th>3.5</th><th>4</th><th>5</th><th>6</th><th>Dia. D</th></tr><tr><td>Dia. Gauge</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>Dia. Gauge</td></tr><tr><td>d1 - max</td><td>-</td><td>4.40</td><td>5.00</td><td>6.00</td><td>7.00</td><td>8.00</td><td>10.00</td><td>12.00</td><td>d1 - max</td></tr><tr><td>k</td><td>-</td><td>1.60</td><td>1.80</td><td>2.10</td><td>2.40</td><td>2.50</td><td>3.20</td><td>4.00</td><td>k</td></tr><tr><td>s - A/F</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>s - A/F</td></tr><tr><td>Recess</td><td>-</td><td>1</td><td>1</td><td>1</td><td>2</td><td>2</td><td>2</td><td>3</td><td>Recess</td></tr></table>	Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D	Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge	d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max	k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k	s - A/F	-	-	-	-	-	-	-	-	s - A/F	Recess	-	1	1	1	2	2	2	3	Recess																																																																																																																						
Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D																																																																																																																																																																										
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge																																																																																																																																																																										
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max																																																																																																																																																																										
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k																																																																																																																																																																										
s - A/F	-	-	-	-	-	-	-	-	s - A/F																																																																																																																																																																										
Recess	-	1	1	1	2	2	2	3	Recess																																																																																																																																																																										
Self-Drilling Screws																																																																																																																																																																																			
Micro Diameter Screws	L - Length mm  Scan the QR Code to view techincal drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbphflna2 L - Length mm																																																																																																																																																																																		
Hammer Drive Screws	<table><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td></tr><tr><td>6</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>6</td></tr><tr><td>8</td><td></td><td></td><td></td><td>●</td><td></td><td></td><td></td><td></td><td>8</td></tr><tr><td>10</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>10</td></tr><tr><td>12</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>12</td></tr><tr><td>14</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>14</td></tr><tr><td>16</td><td></td><td></td><td></td><td></td><td>●</td><td>●</td><td></td><td></td><td>16</td></tr><tr><td>18</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>18</td></tr><tr><td>20</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>20</td></tr><tr><td>25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>25</td></tr><tr><td>30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>30</td></tr><tr><td>35</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>35</td></tr><tr><td>40</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>40</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr></table>	5									5	6									6	8				●					8	10				●	●	●			10	12				●	●	●			12	14				●	●	●			14	16					●	●			16	18									18	20									20	25									25	30									30	35									35	40									40	-									-	-									-	-									-	-									-								
5									5																																																																																																																																																																										
6									6																																																																																																																																																																										
8				●					8																																																																																																																																																																										
10				●	●	●			10																																																																																																																																																																										
12				●	●	●			12																																																																																																																																																																										
14				●	●	●			14																																																																																																																																																																										
16					●	●			16																																																																																																																																																																										
18									18																																																																																																																																																																										
20									20																																																																																																																																																																										
25									25																																																																																																																																																																										
30									30																																																																																																																																																																										
35									35																																																																																																																																																																										
40									40																																																																																																																																																																										
-									-																																																																																																																																																																										
-									-																																																																																																																																																																										
-									-																																																																																																																																																																										
-									-																																																																																																																																																																										
K-Series® Setzmuttern																																																																																																																																																																																			
Rivet Bushes																																																																																																																																																																																			
Self-Clinching Fasteners																																																																																																																																																																																			
CD Weld Studs																																																																																																																																																																																			
Brass Inserts for Plastics																																																																																																																																																																																			

PRODUCT CODE EXAMPLE

SSPSBPHFLN40016A2

PRODUCT DESCRIPTION EXAMPLE

4 x 16 Cross Recess (H) Flange Plas-Tech® 30° Screw A2 Stainless Steel

●

A2 Stainless Steel - preferred and available from stock.


12

E. & O. E. Plas-Tech® is a registered trademark of Lancaster Fastener Co Ltd.

© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

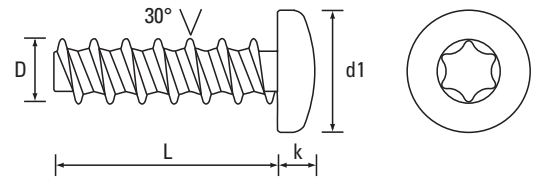

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.00	4.20	5.60	6.90	7.50	8.20	10.80	d1 - max
k	-	1.50	1.60	2.10	2.30	2.60	2.90	3.80	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T7	T10	T10	T20	T20	T25	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxpanzc								L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●	●	● ●			8
10		●	●	● ●	● ●	● ●	● ●		10
12			●	● ●	● ●	● ●	● ●	●	12
14			●	● ●	● ●	● ●	●		14
16			●	● ●	● ●	● ●	● ●	● ●	16
18				●	● ●	●			18
20				● ●	●	● ●	● ●	● ●	20
25				● ●	●	● ●	● ●	● ●	25
30				● ●	●	● ●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXPAN25006ZC
 PSBPTXPAN50010ZN

PRODUCT DESCRIPTION EXAMPLE

2.5 x 6 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 5 x 10 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

Screws for Plastics

ISO & DIN 7500 Tap-Fix® Screws

Machine Screws

Self-Tapping Screws

Self-Drilling Screws

Micro Diameter Screws

Hammer Drive Screws

K-Series® Setzmuttern

Rivet Bushes

Self-Clinching Fasteners

CD Weld Studs

Brass Inserts for Plastics


Plas-Tech® 30° Screws

Thread Forming Screws for Plastic Applications

T-Drive® (6-Lobe) Pan

A2 Stainless Steel



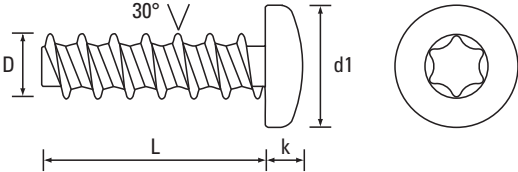

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.00	4.20	5.60	6.90	7.50	8.20	10.80	d1 - max
k	-	1.50	1.60	2.10	2.30	2.60	2.90	3.80	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T7	T10	T10	T20	T20	T25	Recess



Scan the QR Code to view techincal drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbptxpana2>

L - Length mm									L - Length mm
5									5
6			●	●					6
8			●	●	●	●			8
10			●	●	●	●	●		10
12				●	●	●	●		12
14				●	●	●			14
16				●	●	●	●		16
18				●	●	●			18
20				●	●	●	●		20
25						●	●		25
30						●	●		30
35									35
40									40
-									-
-									-
-									-
-									-

●

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSPSBPTXPAN40012A2

PRODUCT DESCRIPTION EXAMPLE


4 x 12 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw A2 Stainless Steel

14

E. & O. E. Plas-Tech® & T-Drive® are registered trademarks of Lancaster Fastener Co Ltd.
© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

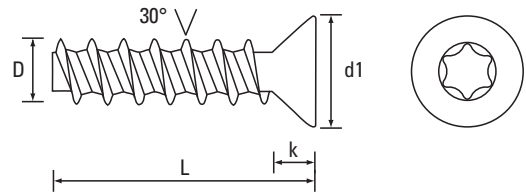

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxcskzc								L - Length mm
5									5
6		●	●	●					6
8			●	● ●					8
10			●	● ●	● ●	● ●			10
12				● ●	● ●	● ●			12
14									14
16				● ●	●	● ●	●		16
18									18
20				● ●	●	●	● ●		20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.




Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXCSK30010ZC
 PSBPTXCSK40016ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 4 x 16 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

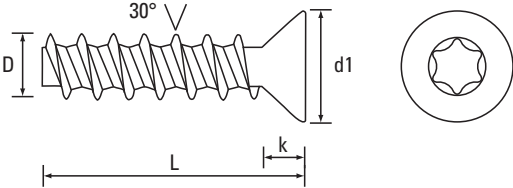Plas-Tech® 30° Screws										Thread Forming Screws for Plastic Applications																																																																																																																																																																																																																																																																																													
T-Drive® (6-Lobe) Countersunk										A2 Stainless Steel																																																																																																																																																																																																																																																																																													
																																																																																																																																																																																																																																																																																																							
<table><tr><th>Dia. D</th><th>1.8</th><th>2.2</th><th>2.5</th><th>3</th><th>3.5</th><th>4</th><th>5</th><th>6</th><th>Dia. D</th></tr><tr><td>Dia. Gauge</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>Dia. Gauge</td></tr><tr><td>d1 - max</td><td>-</td><td>3.80</td><td>4.70</td><td>5.50</td><td>7.30</td><td>8.40</td><td>9.30</td><td>11.30</td><td>d1 - max</td></tr><tr><td>k - ref</td><td>-</td><td>1.30</td><td>1.75</td><td>2.05</td><td>2.80</td><td>3.25</td><td>3.40</td><td>3.80</td><td>k - ref</td></tr><tr><td>s - A/F</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>s - A/F</td></tr><tr><td>Recess</td><td>-</td><td>T6</td><td>T8</td><td>T8</td><td>T15</td><td>T20</td><td>T20</td><td>T30</td><td>Recess</td></tr></table>										Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D	Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge	d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max	k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref	s - A/F	-	-	-	-	-	-	-	-	s - A/F	Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess	<table><tr><th>L - Length mm</th><td colspan="10">  Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbptxcska2 </td><th>L - Length mm</th></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td></tr><tr><td>6</td><td></td><td></td><td></td><td>●</td><td></td><td></td><td></td><td></td><td></td><td></td><td>6</td></tr><tr><td>8</td><td></td><td></td><td></td><td>●</td><td>●</td><td></td><td></td><td></td><td></td><td></td><td>8</td></tr><tr><td>10</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td>10</td></tr><tr><td>12</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td>12</td></tr><tr><td>14</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>14</td></tr><tr><td>16</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td>16</td></tr><tr><td>18</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>18</td></tr><tr><td>20</td><td></td><td></td><td></td><td></td><td></td><td>●</td><td>●</td><td></td><td></td><td></td><td>20</td></tr><tr><td>25</td><td></td><td></td><td></td><td></td><td></td><td></td><td>●</td><td></td><td></td><td></td><td>25</td></tr><tr><td>30</td><td></td><td></td><td></td><td></td><td></td><td></td><td>●</td><td></td><td></td><td></td><td>30</td></tr><tr><td>35</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>35</td></tr><tr><td>40</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>40</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr></table>										L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbptxcska2										L - Length mm	5											5	6				●							6	8				●	●						8	10				●	●	●	●				10	12				●	●	●	●				12	14											14	16				●	●	●	●				16	18											18	20						●	●				20	25							●				25	30							●				30	35											35	40											40	-											-	-											-	-											-	-											-
Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D																																																																																																																																																																																																																																																																																														
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge																																																																																																																																																																																																																																																																																														
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max																																																																																																																																																																																																																																																																																														
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref																																																																																																																																																																																																																																																																																														
s - A/F	-	-	-	-	-	-	-	-	s - A/F																																																																																																																																																																																																																																																																																														
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess																																																																																																																																																																																																																																																																																														
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbptxcska2										L - Length mm																																																																																																																																																																																																																																																																																												
5											5																																																																																																																																																																																																																																																																																												
6				●							6																																																																																																																																																																																																																																																																																												
8				●	●						8																																																																																																																																																																																																																																																																																												
10				●	●	●	●				10																																																																																																																																																																																																																																																																																												
12				●	●	●	●				12																																																																																																																																																																																																																																																																																												
14											14																																																																																																																																																																																																																																																																																												
16				●	●	●	●				16																																																																																																																																																																																																																																																																																												
18											18																																																																																																																																																																																																																																																																																												
20						●	●				20																																																																																																																																																																																																																																																																																												
25							●				25																																																																																																																																																																																																																																																																																												
30							●				30																																																																																																																																																																																																																																																																																												
35											35																																																																																																																																																																																																																																																																																												
40											40																																																																																																																																																																																																																																																																																												
-											-																																																																																																																																																																																																																																																																																												
-											-																																																																																																																																																																																																																																																																																												
-											-																																																																																																																																																																																																																																																																																												
-											-																																																																																																																																																																																																																																																																																												
● A2 Stainless Steel - preferred and available from stock.																																																																																																																																																																																																																																																																																																							
PRODUCT CODE EXAMPLE SSPSBPTXCSK40010A2										PRODUCT DESCRIPTION EXAMPLE 4 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw A2 Stainless Steel																																																																																																																																																																																																																																																																																													


16

E. & O. E. Plas-Tech® & T-Drive® are registered trademarks of Lancaster Fastener Co Ltd.

© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

T-Drive® (6-Lobe) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

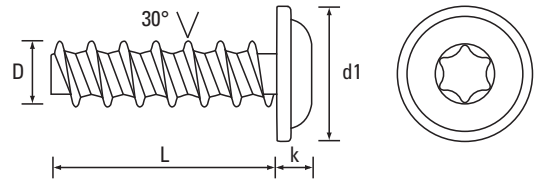

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.50	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.40	1.50	2.10	2.40	2.60	3.30	3.60	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T6	T10	T10	T20	T20	T25	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxflnzc								L - Length mm
5									5
6			●	● ●					6
8			●	● ●	●	● ●	●		8
10			●	● ●	● ●	● ●	● ●		10
12				● ●	● ●	● ●	● ●	●	12
14				● ●	●	●	● ●	● ●	14
16				●	● ●	● ●	● ●	● ●	16
18				●	●	●	●	● ●	18
20				● ●	●	● ●	● ●	● ●	20
25				●	●	● ●	● ●	●	25
30						●	● ●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE



PSBPTXFLN30010ZC
PSBPTXFLN50012ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
5 x 12 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

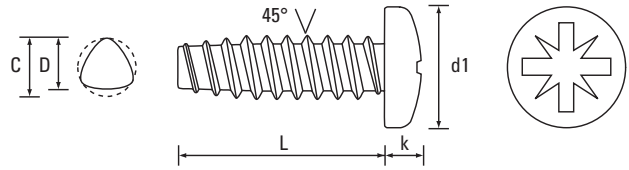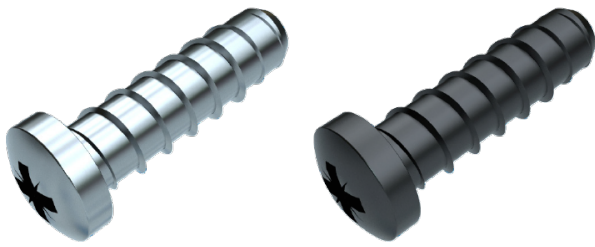

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	3.60	4.24	4.00	5.00	6.00	7.00	8.00	10.00	d1 - max
k - max	1.50	1.57	1.60	1.95	2.30	2.45	2.80	3.50	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wzpanzc								L - Length mm
4	●								4
5	●	●							5
6	●	●	●	●	●	●			6
8	●	●	●	●	●	●			8
10	●	●	●	●	●	●	●		10
12		●	●	●	●	●	●		12
16				● ●	●	●	●	●	16
20				●	● ●	●	●	●	20
25				●		●	●	●	25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PT45WZPAN18004ZC

PT45WZPAN30016ZN



PRODUCT DESCRIPTION EXAMPLE

1.8 x 4 Cross Recess (Z) Pan Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

3 x 16 Cross Recess (Z) Pan Plas-Fix® 45° Screw Steel / Black (CR3)

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

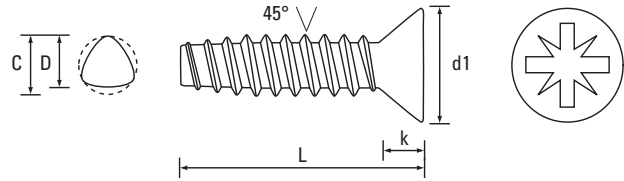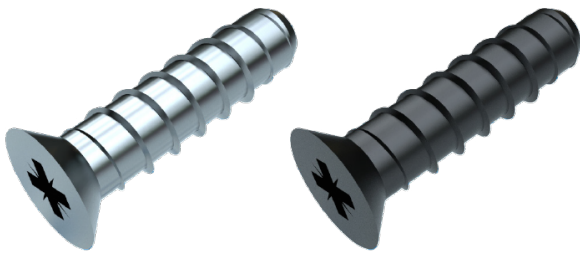

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wzcskzc								L - Length mm
4									4
5									5
6			●	●	●				6
8			●	●	●	●			8
10			●	● ●	●	●	●		10
12				● ●	●	●	●		12
16				●	●	●			16
20				● ●	●	●	●		20
25				●		●	●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PT45WZCSK35006ZC

PT45WZCSK30020ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 6 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

3 x 20 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw Steel / Black (CR3)

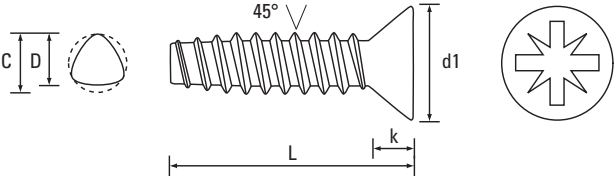Screws for Plastics	Plas-Fix® 45° Screws								Thread Rolling Screws for Plastic Applications																																																																																																																																																																																				
	Cross Recess (Z) Countersunk								A2 Stainless Steel																																																																																																																																																																																				
ISO & DIN 7500 Tap-Fix® Screws																																																																																																																																																																																													
Machine Screws																																																																																																																																																																																													
Self-Tapping Screws	<table><tr><th>Dia. D max</th><th>1.8</th><th>2.2</th><th>2.5</th><th>3</th><th>3.5</th><th>4</th><th>5</th><th>6</th><th>Dia. D max</th></tr><tr><td>Dia. C max</td><td>1.85</td><td>2.25</td><td>2.55</td><td>3.05</td><td>3.55</td><td>4.06</td><td>5.06</td><td>6.06</td><td>Dia. C max</td></tr><tr><td>d1 - max</td><td>-</td><td>-</td><td>4.40</td><td>5.50</td><td>6.30</td><td>7.35</td><td>8.40</td><td>10.00</td><td>d1 - max</td></tr><tr><td>k - ref</td><td>-</td><td>-</td><td>1.30</td><td>1.50</td><td>1.65</td><td>1.90</td><td>2.20</td><td>2.50</td><td>k - ref</td></tr><tr><td>s - A/F</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>s - A/F</td></tr><tr><td>Recess</td><td>0</td><td>1</td><td>1</td><td>1</td><td>1</td><td>2</td><td>2</td><td>2</td><td>Recess</td></tr></table>	Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max	Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max	d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max	k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref	s - A/F	-	-	-	-	-	-	-	-	s - A/F	Recess	0	1	1	1	1	2	2	2	Recess																																																																																																																																
Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max																																																																																																																																																																																				
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max																																																																																																																																																																																				
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max																																																																																																																																																																																				
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref																																																																																																																																																																																				
s - A/F	-	-	-	-	-	-	-	-	s - A/F																																																																																																																																																																																				
Recess	0	1	1	1	1	2	2	2	Recess																																																																																																																																																																																				
Self-Drilling Screws																																																																																																																																																																																													
Micro Diameter Screws	<table><tr><th>L - Length mm</th><td colspan="8">  Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wzcska2 </td><th>L - Length mm</th></tr><tr><td>4</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>4</td></tr><tr><td>5</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>5</td></tr><tr><td>6</td><td></td><td></td><td></td><td>●</td><td>●</td><td></td><td></td><td></td><td>6</td></tr><tr><td>8</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>8</td></tr><tr><td>10</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>10</td></tr><tr><td>12</td><td></td><td></td><td></td><td>●</td><td>●</td><td>●</td><td></td><td></td><td>12</td></tr><tr><td>16</td><td></td><td></td><td></td><td></td><td>●</td><td>●</td><td></td><td></td><td>16</td></tr><tr><td>20</td><td></td><td></td><td></td><td>●</td><td></td><td>●</td><td></td><td></td><td>20</td></tr><tr><td>25</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>25</td></tr><tr><td>30</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>30</td></tr><tr><td>35</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>35</td></tr><tr><td>40</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>40</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr><tr><td>-</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>-</td></tr></table>	L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wzcska2								L - Length mm	4									4	5									5	6				●	●				6	8				●	●	●			8	10				●	●	●			10	12				●	●	●			12	16					●	●			16	20				●		●			20	25									25	30									30	35									35	40									40	-									-	-									-	-									-	-									-	-									-								
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wzcska2								L - Length mm																																																																																																																																																																																				
4									4																																																																																																																																																																																				
5									5																																																																																																																																																																																				
6				●	●				6																																																																																																																																																																																				
8				●	●	●			8																																																																																																																																																																																				
10				●	●	●			10																																																																																																																																																																																				
12				●	●	●			12																																																																																																																																																																																				
16					●	●			16																																																																																																																																																																																				
20				●		●			20																																																																																																																																																																																				
25									25																																																																																																																																																																																				
30									30																																																																																																																																																																																				
35									35																																																																																																																																																																																				
40									40																																																																																																																																																																																				
-									-																																																																																																																																																																																				
-									-																																																																																																																																																																																				
-									-																																																																																																																																																																																				
-									-																																																																																																																																																																																				
-									-																																																																																																																																																																																				
Hammer Drive Screws																																																																																																																																																																																													
K-Series® Setzmuttern																																																																																																																																																																																													
Rivet Bushes																																																																																																																																																																																													
Self-Clinching Fasteners																																																																																																																																																																																													
CD Weld Studs																																																																																																																																																																																													
Brass Inserts for Plastics																																																																																																																																																																																													

PRODUCT CODE EXAMPLE

SSPT45WZCSK40008A2

PRODUCT DESCRIPTION EXAMPLE


4 x 8 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel

● A2 Stainless Steel - preferred and available from stock.

22

E. & O. E. Plas-Fix® is a registered trademark of Lancaster Fastener Co Ltd.

© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

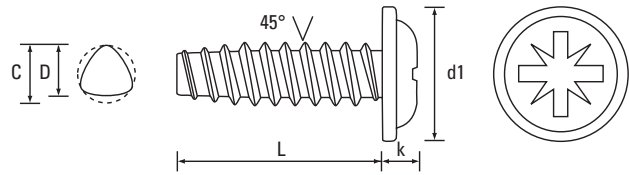


Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	-	-	-	-	6.60	8.00	9.60	12.00	d1 - max
k - max	-	-	-	-	1.60	2.00	2.30	2.90	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wzflnzc								L - Length mm
4									4
5									5
6									6
8						●			8
10					●		●		10
12					●		●		12
16						●	●		16
20						●	●		20
25						●	●		25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WZFLN50020ZC

PRODUCT DESCRIPTION EXAMPLE
5 x 20 Cross Recess (Z) Flange Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

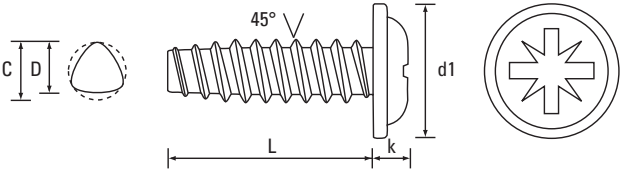
Screws for Plastics	Plas-Fix® 45° Screws								Thread Rolling Screws for Plastic Applications																																																												
	Cross Recess (Z) Flange								A2 Stainless Steel																																																												
ISO & DIN 7500 Tap-Fix® Screws																																																																					
Machine Screws																																																																					
Self-Tapping Screws	<table><tr><th>Dia. D max</th><th>1.8</th><th>2.2</th><th>2.5</th><th>3</th><th>3.5</th><th>4</th><th>5</th><th>6</th><th>Dia. D max</th></tr><tr><td>Dia. C max</td><td>1.85</td><td>2.25</td><td>2.55</td><td>3.05</td><td>3.55</td><td>4.06</td><td>5.06</td><td>6.06</td><td>Dia. C max</td></tr><tr><td>d1 - max</td><td>-</td><td>-</td><td>-</td><td>-</td><td>6.60</td><td>8.00</td><td>9.60</td><td>12.00</td><td>d1 - max</td></tr><tr><td>k - max</td><td>-</td><td>-</td><td>-</td><td>-</td><td>1.60</td><td>2.00</td><td>2.30</td><td>2.90</td><td>k - max</td></tr><tr><td>s - A/F</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>-</td><td>s - A/F</td></tr><tr><td>Recess</td><td>0</td><td>1</td><td>1</td><td>1</td><td>1</td><td>2</td><td>2</td><td>2</td><td>Recess</td></tr></table>	Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max	Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max	d1 - max	-	-	-	-	6.60	8.00	9.60	12.00	d1 - max	k - max	-	-	-	-	1.60	2.00	2.30	2.90	k - max	s - A/F	-	-	-	-	-	-	-	-	s - A/F	Recess	0	1	1	1	1	2	2	2	Recess								
Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max																																																												
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max																																																												
d1 - max	-	-	-	-	6.60	8.00	9.60	12.00	d1 - max																																																												
k - max	-	-	-	-	1.60	2.00	2.30	2.90	k - max																																																												
s - A/F	-	-	-	-	-	-	-	-	s - A/F																																																												
Recess	0	1	1	1	1	2	2	2	Recess																																																												
Self-Drilling Screws																																																																					
Micro Diameter Screws	L - Length mm  Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wzflna2								L - Length mm																																																												
Hammer Drive Screws	4								4																																																												
	5								5																																																												
	6					●			6																																																												
	8					●	●		8																																																												
	10					●	●	●	10																																																												
K-Series® Setzmuttern	12					●	●	●	12																																																												
	16					●	●	●	16																																																												
	20					●	●	●	20																																																												
	25					●	●	●	25																																																												
	30								30																																																												
Rivet Bushes	35								35																																																												
	40								40																																																												
	-								-																																																												
	-								-																																																												
Self-Clinching Fasteners	-								-																																																												
	-								-																																																												
	-								-																																																												
	-								-																																																												
CD Weld Studs	● A2 Stainless Steel - preferred and available from stock.																																																																				
Brass Inserts for Plastics	PRODUCT CODE EXAMPLE SSPT45WZFLN35016A2 PRODUCT DESCRIPTION EXAMPLE 3.5 x 16 Cross Recess (Z) Flange Plas-Fix® 45° Screw A2 Stainless Steel																																																																				

24

E. & O. E. Plas-Fix® is a registered trademark of Lancaster Fastener Co Ltd.
© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3)

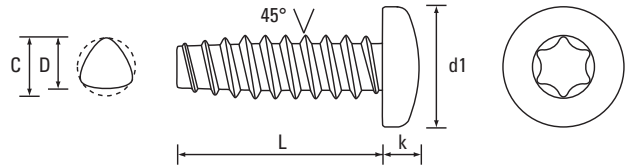


Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wtxpanzc								L - Length mm
4									4
5									5
6			●	●		●			6
8			●	●	●	●			8
10				●	●	●	●		10
12				●	●	●	●		12
16				●	●	●	●		16
20						●	●		20
25					●	●	●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WTXPAN25008ZC

PRODUCT DESCRIPTION EXAMPLE
2.5 x 8 T-Drive® (6-Lobe) Pan Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

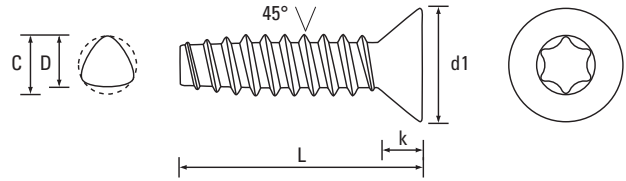


Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	-	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wtxcskzc								L - Length mm
4									4
5									5
6			●	●	●				6
8			●	●		●			8
10			●	●	●	●	●		10
12				●	●	●	●		12
16					●	●	●		16
20					●	●	●		20
25						●	●		25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WTXCSK25006ZC

PRODUCT DESCRIPTION EXAMPLE
2.5 x 6 T-Drive® (6-Lobe) Countersunk Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

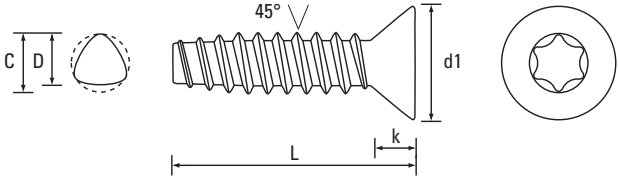Screws for Plastics		Plas-Fix® 45° Screws								Thread Rolling Screws for Plastic Applications	
		T-Drive® (6-Lobe) Countersunk								A2 Stainless Steel	
ISO & DIN 7500 Tap-Fix® Screws											
Machine Screws											
Self-Tapping Screws											
Self-Drilling Screws											
Micro Diameter Screws											
Hammer Drive Screws											
K-Series® Setzmuttern											
Rivet Bushes											
Self-Clinching Fasteners											
CD Weld Studs											
Brass Inserts for Plastics											

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	-	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess

L - Length mm



Scan the QR Code to view techincal drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspt45wtxcska2>

L - Length mm

4									4
5									5
6				●	●				6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
16				●	●	●			16
20				●	●	●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

●



A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
SSPT45WTXCSK30020A2	3 x 20 T-Drive® (6-Lobe) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel

28

E. & O. E. Plas-Fix® & T-Drive® are registered trademarks of Lancaster Fastener Co Ltd.

© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

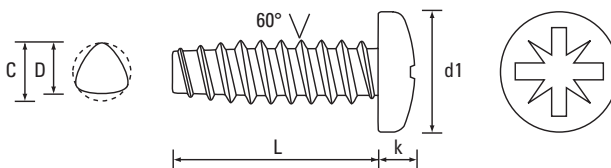

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.167	0.219	0.270	0.322	0.373	-	-	-	d1 - max ins
k - max ins	0.062	0.080	0.097	0.115	0.133	-	-	-	k - max ins
Recess	1	1	2	2	2	-	-	-	Recess
L - Length ins	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ptwzpanzc								L - Length ins
3/16	●	●	●						3/16
1/4	●	●	●						1/4
5/16	●	●	●	●					5/16
3/8	●	●	●	●	●				3/8
7/16	●								7/16
1/2	●	●	●	●	●				1/2
5/8	●	●	●	●					5/8
3/4	●	●	●	●	●				3/4
1		●	●	●					1
1 1/4		●	●						1 1/4
1 3/8			●						1 3/8
1 1/2		●							1 1/2
-									-
-									-
-									-
-									-
-									-




Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PTWZPAN42080ZC

PRODUCT DESCRIPTION EXAMPLE

8.16 x 5/16 Cross Recess (Z) Pan Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)

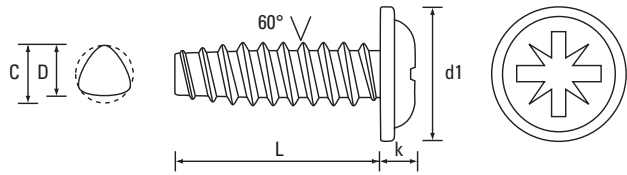

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.194	0.257	0.321	0.384	0.448	-	-	-	d1 - max ins
k - max ins	0.059	0.063	0.074	0.093	0.114	-	-	-	k - max ins
Recess	1	1	2	2	2	-	-	-	Recess
L - Length ins	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ptwzflnzc								L - Length ins
3/16									3/16
1/4		●	●						1/4
5/16			●						5/16
3/8			●	●					3/8
7/16									7/16
1/2			●						1/2
5/8		●							5/8
3/4									3/4
1									1
1 1/4									1 1/4
1 3/8									1 3/8
1 1/2									1 1/2
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PTWZFLN35095ZC

PRODUCT DESCRIPTION EXAMPLE
6.19 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)

Screws for
Plastics

ISO & DIN 7500
Tap-Fix® Screws

Machine
Screws

Self-Tapping
Screws

Self-Drilling
Screws

Micro Diameter
Screws

Hammer Drive
Screws

K-Series®
Setzmuttern

Rivet
Bushes

Self-Clinching
Fasteners

CD Weld
Studs

Brass Inserts
for Plastics


Thread Cutting Screws

For Plastic Applications

Cross Recess (Z) Pan Type BT BS 4174

Steel / Zinc Plated (CR3)



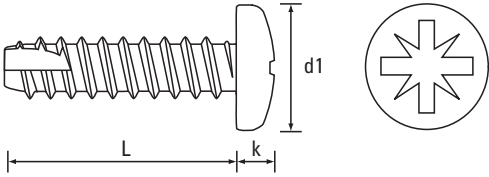

Dia. mm	2.9	3.5	4.2	4.8	-	-	-	-	Dia. mm
Dia. Gauge	4	6	8	10	-	-	-	-	Dia. Gauge
d1 - max	5.56	6.86	8.18	9.47	-	-	-	-	d1 - max
k - max	2.03	2.46	2.92	3.38	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	2	-	-	-	-	Recess



Scan the QR Code to view techincal drawings for this product range
<https://www.lancasterfastener.com/drawings-for-tcbtzpanzc>

L - Length mm									L - Length ins
4.5									3/16
6.5	●								1/4
8	●								5/16
9.5	●	●	●	●					3/8
11									7/16
13	●	●	●	●					1/2
16	●		●	●					5/8
19	●		●	●					3/4
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TCBTZPAN48130ZC

PRODUCT DESCRIPTION EXAMPLE
4.8 x 13 Cross Recess (Z) Pan Type BT BS 4174 Thread Cutting Screw Steel / Zinc Plated (CR3)

32



E. & O. E.
© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

Thread Cutting Screws

For Plastic Applications

Cross Recess (Z) Pan Type Y BS 4174

Steel / Zinc Plated (CR3)

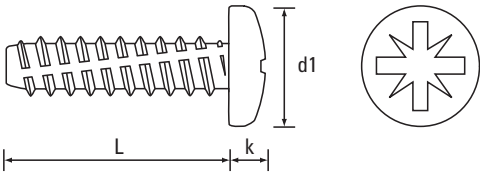

Dia. mm	2.9	3.5	4.2	-	-	-	-	-	Dia. mm
Dia. Gauge	4	6	8	-	-	-	-	-	Dia. Gauge
d1 - max	5.56	6.86	8.18	-	-	-	-	-	d1 - max
k - max	2.03	2.46	2.92	-	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	-	-	-	-	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-tcyzpanzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●						3/8
11									7/16
13	●								1/2
16									5/8
19									3/4
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TCYZPAN29130ZC

PRODUCT DESCRIPTION EXAMPLE
2.9 x 13 Cross Recess (Z) Pan Type Y BS 4174 Thread Cutting Screw Steel / Zinc Plated (CR3)

