


# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

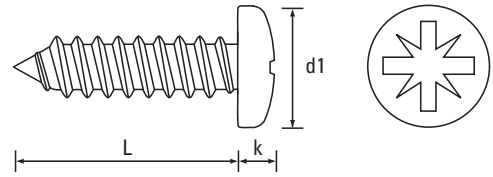

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabzpanzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ltabzpanzc">https://www.lancasterfastener.com/drawings-for-ltabzpanzc</a>									L - Length ins
4.5	●	●								3/16
6.5	●	●	● ●	●	● ●					1/4
8	●	●	● ●		● ●					5/16
9.5	●	●	● ●	●	● ●	● ●				3/8
13	●	●	● ●	● ●	● ●	● ●	● ●	●		1/2
16	●	●	● ●	●	● ●	● ●	● ●	● ●	● ●	5/8
19		●	● ●	● ●	● ●	● ●	● ●	● ●	● ●	3/4
22		●	●		●	●				7/8
25		●	● ●	●	● ●	● ●	● ●	● ●	● ●	1
32		●	● ●	●	● ●	● ●	● ●	● ●	●	1 1/4
38		●	● ●	●	● ●	● ●	● ●	● ●	●	1 1/2
45					●	●	●	●	●	1 3/4
50					● ●	● ●	●	●	●	2
57					●	●		●		2 1/4
63					●	●	●	●		2 1/2
70					●	●				2 3/4
75						●	●	●		3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABZPAN42130ZC  
 LTABZPAN55250ZN

**PRODUCT DESCRIPTION EXAMPLE**

4.2 x 13.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 5.5 x 25.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)

Screws for Plastics

ISO & DIN 7500 Tap-Fix® Screws

Machine Screws

Self-Tapping Screws

Self-Drilling Screws

Micro Diameter Screws

Hammer Drive Screws

K-Series® Setzmuttern

Rivet Bushes

Self-Clinching Fasteners

CD Weld Studs


Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Pan DIN 7981 Type C

A2 Stainless Steel

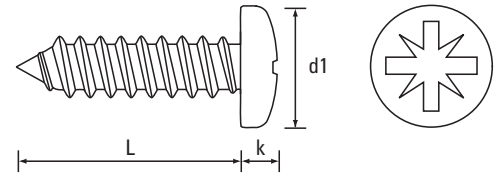

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssabzpana2>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●	●			●			3/8
13			●		●	●			1/2
16					●				5/8
19			●		●	●			3/4
22									7/8
25			●		●	●			1
32									1 1/4
38					●	●			1 1/2
45									1 3/4
50						●			2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 SSLTABZPAN35190A2


PRODUCT DESCRIPTION EXAMPLE  
 3.5 x 19.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw A2 Stainless Steel

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

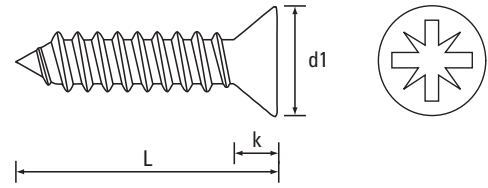

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabzcskzc">https://www.lancasterfastener.com/drawings-for-ltabzcskzc</a></p>	L - Length ins
---------------	---	----------------

4.5	●								3/16
6.5	●	●	●						1/4
8	●	●	●						5/16
9.5	●	●	● ●	●	● ●				3/8
13	●	●	● ●	● ●	● ●	● ●	●		1/2
16	●	●	● ●	● ●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	●	● ●	3/4
22		●	●	●	● ●	●			7/8
25		●	● ●	● ●	● ●	● ●	●	● ●	1
32		●	● ●	●	● ●	● ●	●	●	1 1/4
38			● ●	●	● ●	● ●	●	●	1 1/2
45			●		● ●	● ●	●	●	1 3/4
50			●	●	● ●	● ●	●	●	2
57					●	●			2 1/4
63					●	●	●	●	2 1/2
70					●				2 3/4
75						●	●	●	3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABZCSK48160ZC  
 LTABZCSK35250ZN

**PRODUCT DESCRIPTION EXAMPLE**

4.8 x 16.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

A2 Stainless Steel

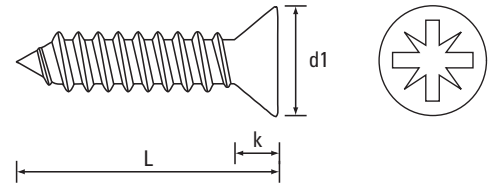

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssabzcska2>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13		●	●		●				1/2
16			●		●				5/8
19			●		●	●			3/4
22									7/8
25			●		●	●			1
32					●				1 1/4
38					●	●			1 1/2
45									1 3/4
50					●				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 SSLTABZCSK35190A2


PRODUCT DESCRIPTION EXAMPLE  
 3.5 x 19.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw A2 Stainless Steel

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

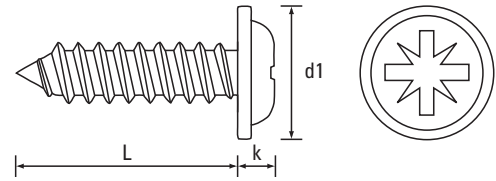

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabzflnzc">https://www.lancasterfastener.com/drawings-for-ltabzflnzc</a></p>									L - Length ins
4.5										3/16
6.5		●	● ●		●					1/4
8		●	● ●		● ●					5/16
9.5		●	● ●	● ●	● ●	● ●				3/8
13		●	● ●	● ●	● ●	● ●	●			1/2
16		●	● ●	● ●	● ●	● ●	● ●	● ●		5/8
19		●	● ●	●	● ●	● ●	● ●	●		3/4
22										7/8
25			● ●		● ●	● ●	● ●	● ●		1
32			● ●		● ●	● ●	● ●	●		1 1/4
38			● ●		● ●	● ●	● ●			1 1/2
45					●	●				1 3/4
50					● ●					2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABZFLN55320ZC  
 LTABZFLN42160ZN

**PRODUCT DESCRIPTION EXAMPLE**

5.5 x 32.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.2 x 16.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw Steel / Black (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type C

A2 Stainless Steel

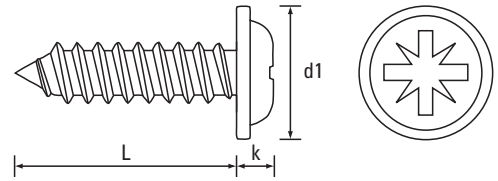

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ssabzflna2">https://www.lancasterfastener.com/drawings-for-ssabzflna2</a>								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5					●				3/8
13			●		●				1/2
16					●	●			5/8
19					●	●			3/4
22									7/8
25					●	●	●		1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
SSLTABZFLN42130A2


PRODUCT DESCRIPTION EXAMPLE  
4.2 x 13.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw A2 Stainless Steel

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Raised Countersunk DIN 7983 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

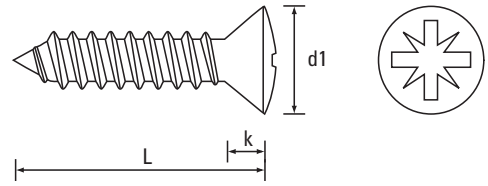

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabzrsdzc">https://www.lancasterfastener.com/drawings-for-ltabzrsdzc</a></p>									L - Length ins
4.5										3/16
6.5										1/4
8										5/16
9.5		●	●							3/8
13		●	● ●	●	● ●	●				1/2
16		●	● ●	●	● ●	●				5/8
19		●	● ●	●	● ●	●	●			3/4
22			●	●	●					7/8
25		●	● ●	●	● ●	● ●				1
32			● ●	●	●	● ●	●			1 1/4
38			●		●	●	●			1 1/2
45					● ●	●				1 3/4
50					●	●	●			2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABZRS55190ZC  
 LTABZRS35320ZN

**PRODUCT DESCRIPTION EXAMPLE**

5.5 x 19.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 32.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Black (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Washer Pan with Earthing Nibs

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

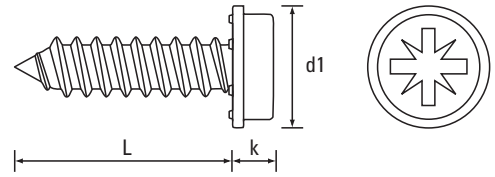

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.50	-	8.50	-	-	-	d1 - max
d2 - ref	-	-	7.00	-	7.00	-	-	-	d2 - ref
k - max	-	-	2.60	-	2.60	-	-	-	k - max
Recess	-	-	2	-	2	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-enabzwpnzc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			● ●		●				3/8
13			●		●				1/2
16									5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

ENABZWP42130ZC  
 ENABZWP35095ZN

PRODUCT DESCRIPTION EXAMPLE


4.2 x 13.0 Cross Recess (Z) Washer Pan with Earthing Nibs Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 9.5 Cross Recess (Z) Washer Pan with Earthing Nibs Type C Self-Tapping Screw Steel / Black (CR3)

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (H) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

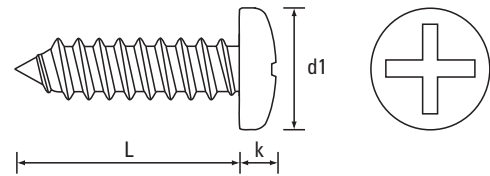

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabhpanzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ltabhpanzc">https://www.lancasterfastener.com/drawings-for-ltabhpanzc</a>									L - Length ins
4.5	●									3/16
6.5	●	●	● ●	● ●	●					1/4
8										5/16
9.5	●	●	● ●	● ●	● ●	● ●				3/8
13	●	●	● ●	● ●	● ●	●	●	●		1/2
16	●	●	● ●	● ●	● ●	● ●	●	●		5/8
19		●	●	●	● ●	● ●	●	●		3/4
22		●	●	●	●	●	●	●		7/8
25		●	●	●	● ●	●	●	●		1
32		●	●	●	●	●	●	●		1 1/4
38		●	●	● ●	●	● ●	●	●		1 1/2
45				●	●	●	●	●		1 3/4
50			●		●	●	●	●		2
57										2 1/4
63								●		2 1/2
70										2 3/4
75										3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABHPAN35130ZC  
 LTABHPAN42190ZN

**PRODUCT DESCRIPTION EXAMPLE**

3.5 x 13.0 Cross Recess (H) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.2 x 19.0 Cross Recess (H) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (H) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

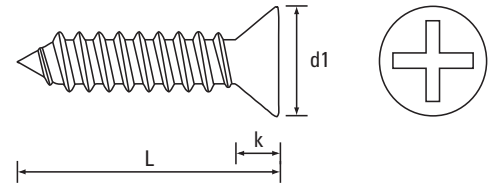

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ltabhcskzc">https://www.lancasterfastener.com/drawings-for-ltabhcskzc</a>									L - Length ins
	4.5									
6.5	●	●								1/4
8										5/16
9.5	●	●	● ●	●	●					3/8
13	●	●	●	●	● ●	●	●			1/2
16		●	● ●	●	●	●	●			5/8
19		●	●	●	● ●	●	●	●		3/4
22			●	●	●	●				7/8
25		●	● ●	●	●	●	●	●		1
32			●	●	●	●	●	●		1 1/4
38				●	●	●	●	●		1 1/2
45						●	●			1 3/4
50					●	●	●	●		2
57										2 1/4
63						●				2 1/2
70						●				2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.


PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
LTABHCSK42160ZC	4.2 x 16.0 Cross Recess (H) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
LTABHCSK35095ZN	3.5 x 9.5 Cross Recess (H) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)

# Self-Tapping Screws


Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

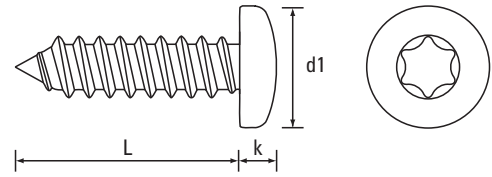

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabtxpanzc">https://www.lancasterfastener.com/drawings-for-ltabtxpanzc</a></p>									L - Length ins
4.5										3/16
6.5	●	●	●		● ●					1/4
8		●	●							5/16
9.5		●	● ●	●	● ●	●				3/8
13		●	● ●	●	● ●	● ●	●	●	●	1/2
16		●	● ●	●	● ●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	● ●	●	●	3/4
22			● ●	●	●					7/8
25		●	● ●	●	● ●	● ●	● ●	●	●	1
32		●	●	●	● ●	●		●	●	1 1/4
38			●	●	● ●	●		●	●	1 1/2
45						●				1 3/4
50					●	●				2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 LTABTXPAN48190ZC  
 LTABTXPAN35160ZN

PRODUCT DESCRIPTION EXAMPLE  
 4.8 x 19.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 16.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)

Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabtxcskzc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●	●						3/8
13		●	● ●	●	● ●	● ●			1/2
16		●	● ●		● ●	● ●			5/8
19		●	● ●		● ●	●			3/4
22									7/8
25			●		● ●	●			1
32					● ●	● ●		●	1 1/4
38					●	● ●		●	1 1/2
45									1 3/4
50								●	2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTABTXCSK48380ZC  
 LTABTXCSK35160ZN

**PRODUCT DESCRIPTION EXAMPLE**



4.8 x 38.0 T-Drive® (6-Lobe) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 16.0 T-Drive® (6-Lobe) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)

# Self-Tapping Screws


Screws for Sheet Metal Applications

Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C

Steel / Zinc Plated (CR3)

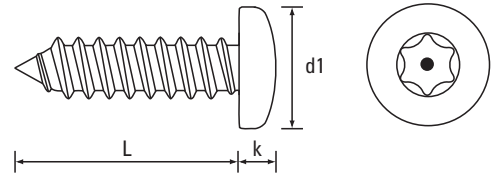

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T27	T30	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabpndrpanzc">https://www.lancasterfastener.com/drawings-for-ltabpndrpanzc</a></p>									L - Length ins
4.5										3/16
6.5										1/4
8										5/16
9.5			●							3/8
13			●			●				1/2
16			●			●				5/8
19			●							3/4
22										7/8
25					●					1
32							●			1 1/4
38							●			1 1/2
45										1 3/4
50										2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABPNDPAN48130ZC

PRODUCT DESCRIPTION EXAMPLE  
4.8 x 13.0 Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Pin T-Drive® (6-Lobe) Countersunk DIN 7982 SIMILAR Type C

Steel / Zinc Plated (CR3)

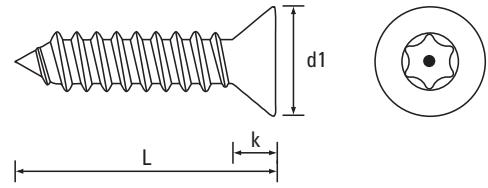

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabpndrckzcc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13					●				1/2
16									5/8
19					●				3/4
22									7/8
25					●				1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
 LTABPNDRCSK35160ZC



PRODUCT DESCRIPTION EXAMPLE  
 3.5 x 16.0 Pin T-Drive® (6-Lobe) Countersunk DIN 7982 SIMILAR Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

# Self-Tapping Screws


Screws for Sheet Metal Applications

Slotted Pan DIN 7971 Type C

Steel / Zinc Plated (CR3)

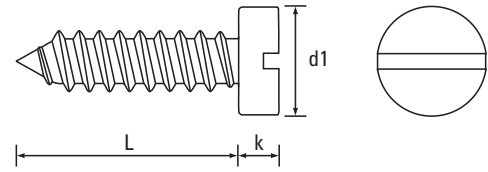

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.35	1.75	2.10	2.25	2.45	2.80	3.20	3.65	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ltabslpanzc">https://www.lancasterfastener.com/drawings-for-ltabslpanzc</a>									L - Length ins
4.5										3/16
6.5	●	●	●							1/4
8		●								5/16
9.5	●	●	●	●	●	●				3/8
13		●	●		●	●	●			1/2
16		●	●	●	●	●	●	●		5/8
19		●	●	●	●	●	●	●		3/4
22										7/8
25		●	●	●	●	●	●	●		1
32			●	●	●	●	●	●		1 1/4
38					●			●		1 1/2
45										1 3/4
50					●			●		2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABSLPAN63500ZC

PRODUCT DESCRIPTION EXAMPLE  
6.3 x 50.0 Slotted Pan DIN 7971 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Slotted Countersunk DIN 7972 Type C

Steel / Zinc Plated (CR3)

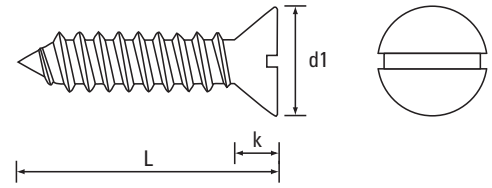

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltbslcskzc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●							3/8
13		●	●		●	●			1/2
16		●	●			●			5/8
19		●	●	●	●				3/4
22									7/8
25		●	●			●			1
32			●						1 1/4
38			●			●			1 1/2
45									1 3/4
50					●				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABSLCSK48380ZC



PRODUCT DESCRIPTION EXAMPLE  
4.8 x 38.0 Slotted Countersunk DIN 7972 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

# Self-Tapping Screws

Screws for Sheet Metal Applications

Slotted Raised Countersunk DIN 7973 Type C

Steel / Zinc Plated (CR3)

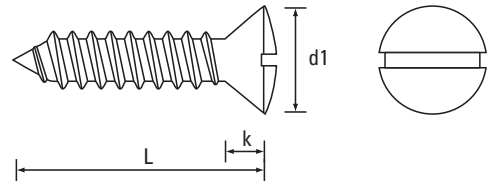

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabslrdszc>

L - Length mm	Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ltabslrdszc">https://www.lancasterfastener.com/drawings-for-ltabslrdszc</a>									L - Length ins
4.5										3/16
6.5										1/4
8										5/16
9.5										3/8
13		●	●				●			1/2
16		●	●		●	●				5/8
19		●	●		●	●				3/4
22										7/8
25		●	●		●	●				1
32			●		●	●				1 1/4
38			●		●	●	●			1 1/2
45										1 3/4
50					●					2
57										2 1/4
63										2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABSLRSD29250ZC

PRODUCT DESCRIPTION EXAMPLE  
2.9 x 25.0 Slotted Raised Countersunk DIN 7973 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)



Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Washer Hexagon DIN 6928 Type C

Steel / Zinc Plated (CR3)

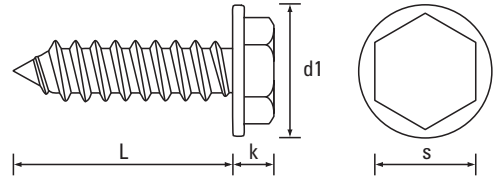

Dia. mm	2.2	2.9	3.5	3.5*	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltabwhxzc>

L - Length mm									L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5				●	●				3/8
13				●	●	●	●	●	1/2
16					●	●	●	●	5/8
19					●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32								●	1 1/4
38								●	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

\* Not to DIN 6928

PRODUCT CODE EXAMPLE  
 LTABWHX55160ZC



PRODUCT DESCRIPTION EXAMPLE  
 5.5 x 16.0 Washer Hexagon DIN 6928 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


# Self-Tapping Screws

Screws for Sheet Metal Applications

Hexagon DIN 7976 Type C

Steel / Zinc Plated (CR3)

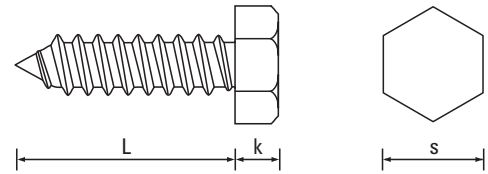

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltabhexzc">https://www.lancasterfastener.com/drawings-for-ltabhexzc</a></p>								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●		●	●			3/8
13			●		●	●	●	●	1/2
16					●	●	●	●	5/8
19			●		●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32						●	●	●	1 1/4
38						●	●	●	1 1/2
45								●	1 3/4
50							●	●	2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTABHEX63190ZC

PRODUCT DESCRIPTION EXAMPLE  
6.3 x 19.0 Hexagon DIN 7976 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Pan DIN 7981 Type F

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

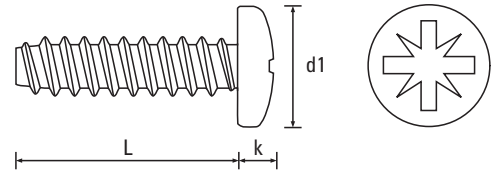

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltbzpanzc>

L - Length mm									L - Length ins
3.0	●								1/8
4.5	●	●	●						3/16
6.5	●	●	● ●	●	● ●	●			1/4
8	●	●	●		●	●			5/16
9.5	●	●	● ●	●	● ●	●			3/8
13	●	●	● ●	●	● ●	●	●	●	1/2
16		●	● ●	●	● ●	●	●		5/8
19		●	●		●	●	●		3/4
22			●			●			7/8
25		●	●		●	●	●		1
32		●	●		●	●			1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTBZPAN22095ZC  
 LTBZPAN42065ZC

PRODUCT DESCRIPTION EXAMPLE


2.2 x 9.5 Cross Recess (Z) Pan Din 7981 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)  
 4.2 x 6.5 Cross Recess (Z) Pan Din 7981 Type F Self-Tapping Screw Steel / Black (CR3)

# Self-Tapping Screws


Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type F

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

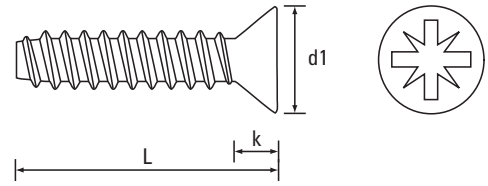

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltbzcskzc">https://www.lancasterfastener.com/drawings-for-ltbzcskzc</a></p>									L - Length ins
4.5	●									3/16
6.5	●	●	●							1/4
8	●	●								5/16
9.5	●	●	● ●		●					3/8
13	●	●	●		●	●				1/2
16		●	●		●	●				5/8
19			●		●	●				3/4
22										7/8
25			●		●	●				1
32								●		1 1/4
38								●		1 1/2
45							●	●		1 3/4
50								●		2
57								●		2 1/4
63								●		2 1/2
70										2 3/4
75										3

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTBZCSK42250ZC  
 LTBZCSK35095ZC

**PRODUCT DESCRIPTION EXAMPLE**

4.2 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 9.5 Cross Recess (Z) Countersunk DIN 7982 Type F Self-Tapping Screw Steel / Black (CR3)


Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type F

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

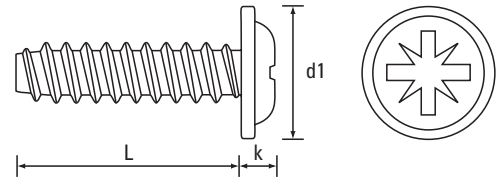

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltbzflnzc>

L - Length mm									L - Length ins
3.0									1/8
4.5									3/16
6.5		●	● ●		●				1/4
8			●		● ●				5/16
9.5		●	●		●	●			3/8
13					● ●	● ●			1/2
16					● ●	●			5/8
19					●				3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

● Steel / Zinc Plated (CR3) - preferred and available from stock.      ● Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

LTBZFLN42160ZC  
 LTBZFLN35064ZC

**PRODUCT DESCRIPTION EXAMPLE**



4.2 x 16.0 Cross Recess (Z) Flange BS 4174 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)  
 3.5 x 6.5 Cross Recess (Z) Flange BS 4174 Type F Self-Tapping Screw Steel / Black (CR3)

# Self-Tapping Screws


Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7981 Type F

Steel / Zinc Plated (CR3)

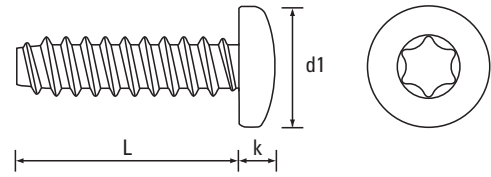

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-ltbtspanzc">https://www.lancasterfastener.com/drawings-for-ltbtspanzc</a></p>								L - Length ins
4.5									3/16
6.5		●	●		●				1/4
8									5/16
9.5		●	●		●	●			3/8
13			●		●	●	●		1/2
16					●	●			5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTBTXPAN55130ZC

PRODUCT DESCRIPTION EXAMPLE  
5.5 x 13.0 T-Drive® (6-Lobe) Pan DIN 7981 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)



Screws for Plastics  
 ISO & DIN 7500 Tap-Fix® Screws  
 Machine Screws  
 Self-Tapping Screws  
 Self-Drilling Screws  
 Micro Diameter Screws  
 Hammer Drive Screws  
 K-Series® Setzmuttern  
 Rivet Bushes  
 Self-Clinching Fasteners  
 CD Weld Studs  
 Brass Inserts for Plastics

# Self-Tapping Screws

Screws for Sheet Metal Applications

Hexagon DIN 7976 Type F

Steel / Zinc Plated (CR3)

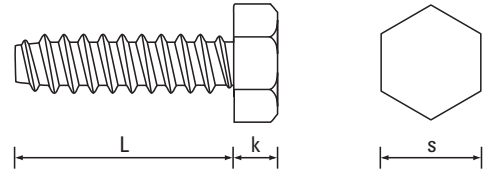

Di. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Di. mm
Di. Gauge	2	4	6	7	8	10	12	14	Di. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ltbhexzc>

L - Length mm									L - Length ins
3.0									1/8
4.5									3/16
6.5									1/4
8									5/16
9.5						●			3/8
13						●	●	●	1/2
16								●	5/8
19							●		3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
LTBHEX63160ZC

PRODUCT DESCRIPTION EXAMPLE  
6.3 x 16.0 Hexagon DIN 7976 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)