


Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess

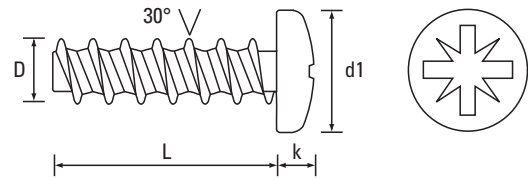

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbpzpanzc>

L - Length mm									L - Length mm
5		●	●						5
6	●	●	●	● ●					6
8		●	●	● ●	● ●	● ●			8
10		●	●	● ●	● ●	● ●	●		10
12		●	●	● ●	● ●	● ●	●	●	12
14			●	● ●	●	● ●	●		14
16			●	● ●	●	● ●	● ●	●	16
18			●	●	●	● ●	●		18
20				● ●	●	● ●	● ●	●	20
25				● ●	●	● ●	● ●	●	25
30				● ●	●	●	●	●	30
35							●	●	35
40						●			40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPZPAN30008ZC
 PSBPZPAN40010ZN

PRODUCT DESCRIPTION EXAMPLE


3 x 8 Cross Recess (Z) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 4 x 10 Cross Recess (Z) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (Z) Pan

A2 Stainless Steel

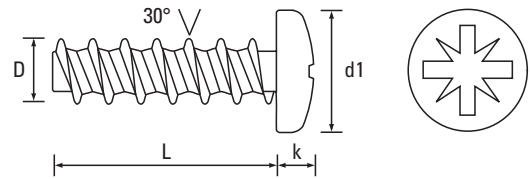

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbpzpana2								L - Length mm
5		●							5
6		●	●	●					6
8		●	●	●	●	●			8
10				●	●	●			10
12				●	●	●	●		12
14				●	●	●			14
16				●	●	●	●		16
18				●	●	●			18
20				●	●	●	●		20
25					●	●			25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSPSBPZPAN35012A2

PRODUCT DESCRIPTION EXAMPLE
3.5 x 12 Cross Recess (Z) Pan Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

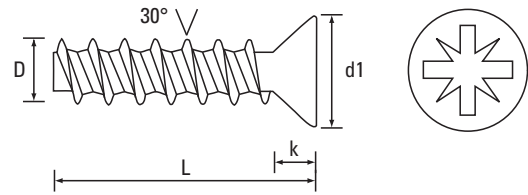

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbpzcskzc>

L - Length mm									L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●	● ●	●			8
10		●	●	● ●	●	●	●		10
12			●	● ●	●	● ●	●	●	12
14			●	● ●	●	●	●		14
16			●	●	●	● ●	●	●	16
18			●	●		●	●		18
20				●	●	●	● ●	●	20
25				●	●	●	●	● ●	25
30						●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPZCSK40020ZC
 PSBPZCSK30010ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 20 Cross Recess (Z) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 3 x 10 Cross Recess (Z) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (Z) Countersunk

A2 Stainless Steel

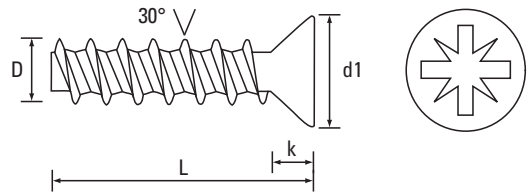

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbpzcska2>

L - Length mm									L - Length mm
5									5
6									6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
14					●	●			14
16					●	●			16
18									18
20									20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSPBZCSK40010A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 10 Cross Recess (Z) Countersunk Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

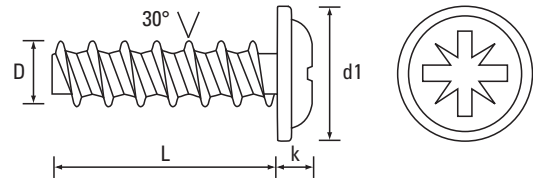

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbpzflnzc>

L - Length mm									L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	●	●	● ●			8
10		●	●	● ●	●	● ●			10
12			●	●	●	●	●	● ●	12
14				●	●	●	●		14
16				●	●	● ●	●	●	16
18						● ●	●		18
20				●	●	●	●	●	20
25					●	●	●	●	25
30						●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPZFLN40008ZC
 PSBPZFLN30006ZN

PRODUCT DESCRIPTION EXAMPLE

4 x 8 Cross Recess (Z) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 3 x 6 Cross Recess (Z) Flange Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (Z) Flange

A2 Stainless Steel

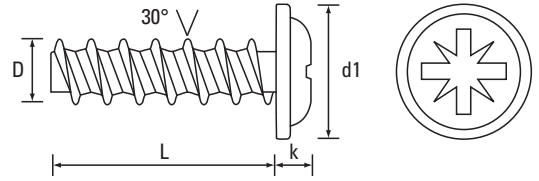

Dia. D	-	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbpzflna2>

L - Length mm									L - Length mm
5									5
6									6
8				●					8
10				●	●	●			10
12				●	●	●			12
14				●	●	●			14
16					●	●			16
18									18
20						●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSPBZFLN35014A2


PRODUCT DESCRIPTION EXAMPLE
 3.5 x 14 Cross Recess (Z) Flange Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (H) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

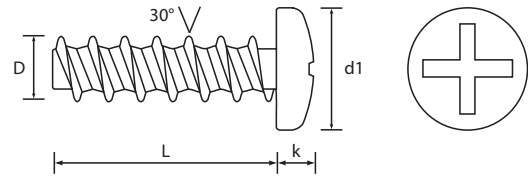

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbphpanzc									L - Length mm
5		●	●							5
6		●	●	● ●						6
8		●	●	● ●		●				8
10		●	●	● ●	●	● ●	●			10
12			●	● ●	●	●	●	●		12
14			●	●	●	●	●			14
16			●	●	●	●	●	●		16
18			●	●	●		●			18
20				●	●	● ●	●	●		20
25				●	●	●	●	●		25
30				●	●	●	●			30
35							● ●			35
40										40
-										-
-										-
-										-
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPHPAN30008ZC
PSBPHPAN30012ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 8 Cross Recess (H) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
3 x 12 Cross Recess (H) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (H) Pan

A2 Stainless Steel

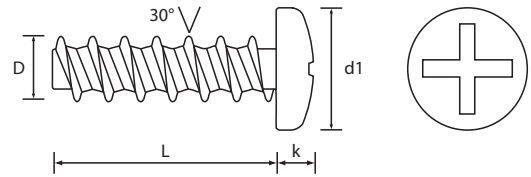

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	3.20	3.90	4.40	5.30	6.10	7.00	8.80	10.50	d1 - max
k	1.20	1.50	1.70	2.00	2.50	2.70	3.40	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	2	2	2	3	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbphpana2>

L - Length mm									L - Length mm
5									5
6				●					6
8				●	●	●			8
10				●	●	●			10
12				●	●	●			12
14				●	●	●			14
16				●	●	●	●		16
18				●	●	●			18
20				●	●	●	●		20
25					●	●			25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSBPHPAN40010A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 10 Cross Recess (H) Pan Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (H) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

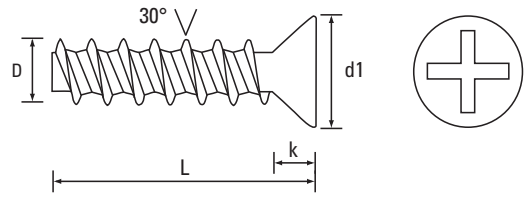

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbphcskzc>

L - Length mm										L - Length mm
5		●								5
6		●	●	●						6
8		●	●	● ●						8
10				● ●	●	●				10
12				● ●	●	●	●	●		12
14					● ●	●	●			14
16				● ●		●	●			16
18							●			18
20				●				●		20
25						●				25
30										30
35										35
40										40
-										-
-										-
-										-
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPHCSK40016ZC
 PSBPHCSK30010ZN

PRODUCT DESCRIPTION EXAMPLE


4 x 16 Cross Recess (H) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 3 x 10 Cross Recess (H) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

Cross Recess (H) Countersunk

A2 Stainless Steel

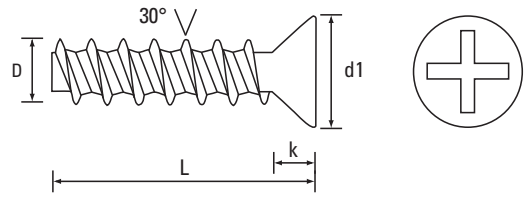

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	2	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbphcska2								L - Length mm
5									5
6									6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
14					●	●			14
16					●	●			16
18									18
20									20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSPSBPHCSK40010A2

PRODUCT DESCRIPTION EXAMPLE
4 x 10 Cross Recess (H) Countersunk Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (H) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

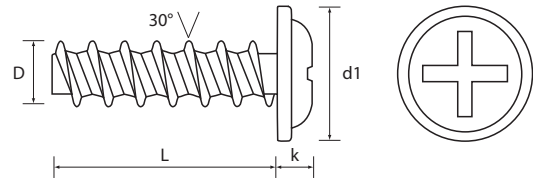

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbphflnzc>

L - Length mm									L - Length mm
5		●	●						5
6		●		●					6
8			●	● ●	●	●			8
10			●	● ●	●	●			10
12			●	●	●	● ●		●	12
14				● ●	●	●	●		14
16				●	●	●	●	●	16
18							●		18
20					●	●		●	20
25					●			●	25
30						●			30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPHFLN40008ZC
 PSBPHFLN30014ZN


PRODUCT DESCRIPTION EXAMPLE

4 x 8 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 3 x 14 Cross Recess (H) Flange Plas-Tech® 30° Screw Steel / Black (CR3)

Screws for Plastics
 ISO & DIN 7500 Tap-Fix® Screws
 Machine Screws
 Self-Tapping Screws
 Self-Drilling Screws
 Micro Diameter Screws
 Hammer Drive Screws
 K-Series® Setzmuttern
 Rivet Bushes
 Self-Dinching Fasteners
 CD Weld Studs
 Brass Inserts for Plastics

Cross Recess (H) Flange

A2 Stainless Steel

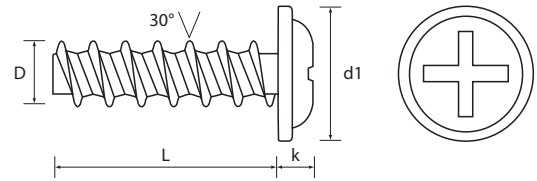

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.40	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.60	1.80	2.10	2.40	2.50	3.20	4.00	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	1	1	2	2	2	3	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbphflna2>

L - Length mm									L - Length mm
5									5
6									6
8				●					8
10				●	●	●			10
12				●	●	●			12
14				●	●	●			14
16					●	●			16
18									18
20									20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSBPHFLN40016A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 16 Cross Recess (H) Flange Plas-Tech® 30° Screw A2 Stainless Steel

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

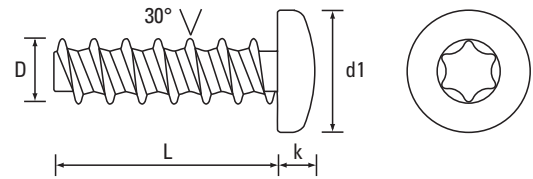

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.00	4.20	5.60	6.90	7.50	8.20	10.80	d1 - max
k	-	1.50	1.60	2.10	2.30	2.60	2.90	3.80	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T7	T10	T10	T20	T20	T25	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxpanzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxpanzc								L - Length mm
5		●	●						5
6		●	●	● ●					6
8		●	●	● ●	●	● ●			8
10		●	●	● ●	● ●	● ●	● ●		10
12			●	● ●	● ●	● ●	● ●	●	12
14			●	● ●	● ●	● ●	●		14
16			●	● ●	● ●	● ●	● ●	● ●	16
18				●	● ●	●			18
20				● ●	●	● ●	● ●	● ●	20
25				● ●	●	● ●	● ●	● ●	25
30				● ●	●	● ●	●	●	30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE



PSBPTXPAN25006ZC
 PSBPTXPAN50010ZN

PRODUCT DESCRIPTION EXAMPLE

2.5 x 6 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 5 x 10 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw Steel / Black (CR3)

T-Drive® (6-Lobe) Pan

A2 Stainless Steel

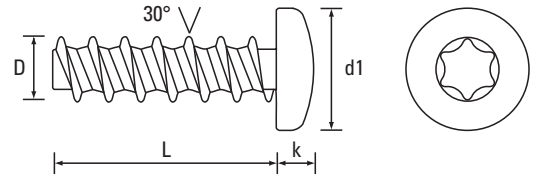

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.00	4.20	5.60	6.90	7.50	8.20	10.80	d1 - max
k	-	1.50	1.60	2.10	2.30	2.60	2.90	3.80	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T7	T10	T10	T20	T20	T25	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbptxpana2>

L - Length mm									L - Length mm
5									5
6			●	●					6
8			●	●	●	●			8
10			●	●	●	●	●		10
12				●	●	●	●		12
14				●	●	●			14
16				●	●	●	●		16
18				●	●	●			18
20				●	●	●	●		20
25						●	●		25
30						●	●		30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSBPTXPAN40012A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 12 T-Drive® (6-Lobe) Pan Plas-Tech® 30° Screw A2 Stainless Steel

T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

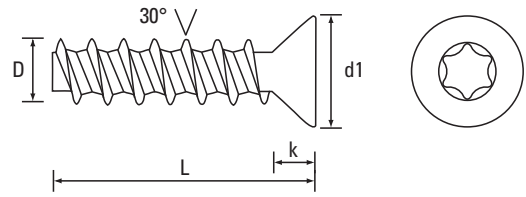

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxcskzc								L - Length mm
5									5
6		●	●	●					6
8			●	● ●					8
10			●	● ●	● ●	● ●			10
12				● ●	● ●	● ●			12
14									14
16				● ●	●	● ●	●		16
18									18
20				● ●	●	●	● ●		20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PSBPTXCCK30010ZC
 PSBPTXCCK40016ZN

PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 4 x 16 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw Steel / Black (CR3)

T-Drive® (6-Lobe) Countersunk

A2 Stainless Steel

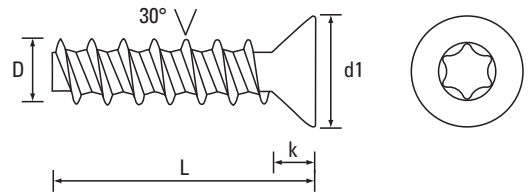

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	3.80	4.70	5.50	7.30	8.40	9.30	11.30	d1 - max
k - ref	-	1.30	1.75	2.05	2.80	3.25	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T8	T8	T15	T20	T20	T30	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspsbptxcska2>

L - Length mm									L - Length mm
5									5
6				●					6
8				●	●				8
10				●	●	●	●		10
12				●	●	●	●		12
14									14
16				●	●	●	●		16
18									18
20						●	●		20
25							●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPSBPTXCSK40010A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 10 T-Drive® (6-Lobe) Countersunk Plas-Tech® 30° Screw A2 Stainless Steel

T-Drive® (6-Lobe) Flange

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

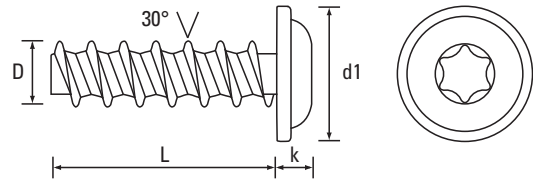

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.50	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.40	1.50	2.10	2.40	2.60	3.30	3.60	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T6	T10	T10	T20	T20	T25	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-psbptxfnlncz>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-psbptxfnlncz									L - Length mm
5										5
6			●	● ●						6
8			●	● ●	●	● ●	●			8
10			●	● ●	● ●	● ●	● ●			10
12				● ●	● ●	● ●	● ●	●		12
14				● ●	●	●	● ●	● ●	● ●	14
16				●	● ●	● ●	● ●	● ●	● ●	16
18				●	●	●	●	● ●	● ●	18
20				● ●	●	● ●	● ●	● ●	● ●	20
25				●	●	● ●	● ●	●		25
30						●	● ●	●		30
35										35
40										40
-										-
-										-
-										-
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PSBPTXFLN30010ZC
 PSBPTXFLN50012ZN


PRODUCT DESCRIPTION EXAMPLE

3 x 10 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Zinc Plated (CR3)
 5 x 12 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw Steel / Black (CR3)


Screws for Plastics
 ISO & DIN 7500 Tap-Fix® Screws
 Machine Screws
 Self-Tapping Screws
 Self-Drilling Screws
 Micro Diameter Screws
 Hammer Drive Screws
 K-Series® Setzmuttern
 Rivet Bushes
 Self-Dinching Fasteners
 CD Weld Studs
 Brass Inserts for Plastics

T-Drive® (6-Lobe) Flange

A2 Stainless Steel

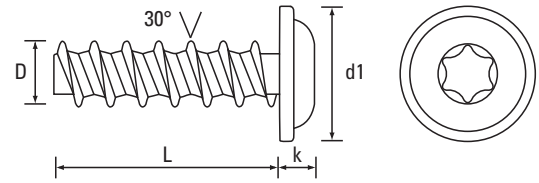

Dia. D	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D
Dia. Gauge	-	-	-	-	-	-	-	-	Dia. Gauge
d1 - max	-	4.50	5.00	6.00	7.00	8.00	10.00	12.00	d1 - max
k	-	1.40	1.50	2.10	2.40	2.60	3.30	3.60	k
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T6	T6	T10	T10	T20	T20	T25	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspsbptxflna2								L - Length mm
5									5
6									6
8				●					8
10				●	●	●			10
12				●	●	●	●		12
14				●	●	●	●		14
16						●	●		16
18									18
20									20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSPSBPTXFLN30008A2

PRODUCT DESCRIPTION EXAMPLE
3 x 8 T-Drive® (6-Lobe) Flange Plas-Tech® 30° Screw A2 Stainless Steel

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

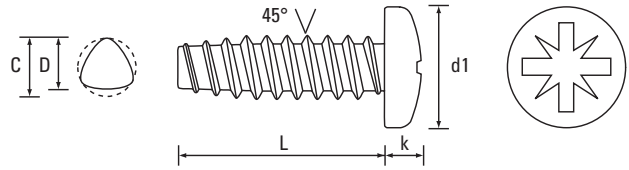

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	3.60	4.24	4.00	5.00	6.00	7.00	8.00	10.00	d1 - max
k - max	1.50	1.57	1.60	1.95	2.30	2.45	2.80	3.50	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-pt45wzpanzc>

L - Length mm									L - Length mm
4	●								4
5	●	●							5
6	●	●	●	●	●	●			6
8	●	●	●	●	●	●			8
10	●	●	●	●	●	●	●		10
12		●	●	●	●	●	●		12
16				● ●	●	●	●	●	16
20				●	● ●	●	●	●	20
25				●		●	●	●	25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PT45WZPAN18004ZC
 PT45WZPAN30016ZN

PRODUCT DESCRIPTION EXAMPLE


1.8 x 4 Cross Recess (Z) Pan Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)
 3 x 16 Cross Recess (Z) Pan Plas-Fix® 45° Screw Steel / Black (CR3)

Plas-Fix® 45° Screws

Thread Rolling Screws for Plastic Applications

Cross Recess (Z) Pan

A2 Stainless Steel

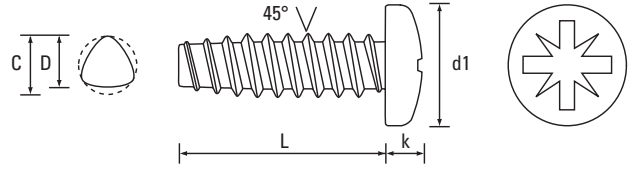

Di. D max	1.8	2.2	2.5	3	3.5	4	5	6	Di. D max
Di. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Di. C max
d1 - max	3.60	4.24	4.00	5.00	6.00	7.00	8.00	10.00	d1 - max
k - max	1.50	1.57	1.60	1.95	2.30	2.45	2.80	3.50	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspt45wzpana2>



L - Length mm									L - Length mm
4									4
5									5
6			●	●	●				6
8			●	●	●	●			8
10			●	●	●	●			10
12			●	●	●	●			12
16				●	●	●			16
20				●	●	●			20
25					●	●			25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
SSPT45WZPAN30006	3 x 6 Cross Recess (Z) Pan Plas-Fix® 45° Screw A2 Stainless Steel

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

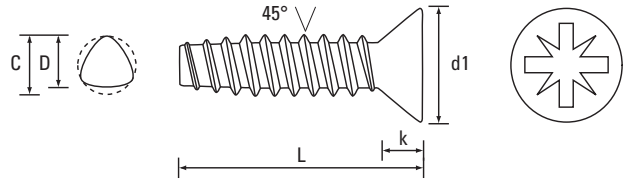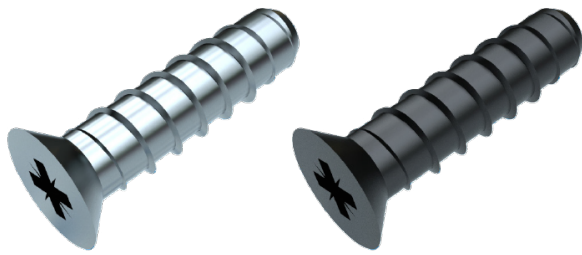

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-pt45wzcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wzcskzc									L - Length mm
4										4
5										5
6			●	●	●					6
8			●	●	●	●				8
10			●	● ●	●	●	●			10
12				● ●	●	●	●			12
16				●	●	●				16
20				● ●	●	●	●			20
25				●		●	●			25
30							●			30
35										35
40										40
-										-
-										-
-										-
-										-
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

PT45WZCSK35006ZC
 PT45WZCSK30020ZN

PRODUCT DESCRIPTION EXAMPLE


3.5 x 6 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)
 3 x 20 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw Steel / Black (CR3)

Plas-Fix® 45° Screws

Thread Rolling Screws for Plastic Applications

Cross Recess (Z) Countersunk

A2 Stainless Steel

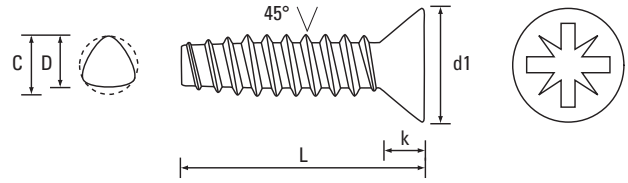

Di. D max	1.8	2.2	2.5	3	3.5	4	5	6	Di. D max
Di. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Di. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	10.00	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	2.50	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspt45wzcska2>

L - Length mm									L - Length mm
4									4
5									5
6				●	●				6
8				●	●	●			8
10				●	●	●			10
12				●	●	●			12
16					●	●			16
20				●		●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPT45WZCSK40008A2


PRODUCT DESCRIPTION EXAMPLE
 4 x 8 Cross Recess (Z) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)

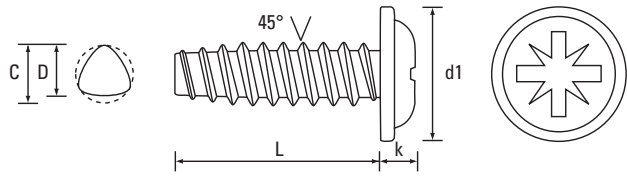

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	-	-	-	-	6.60	8.00	9.60	12.00	d1 - max
k - max	-	-	-	-	1.60	2.00	2.30	2.90	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-pt45wzflnzc								L - Length mm
4									4
5									5
6									6
8						●			8
10					●		●		10
12					●		●		12
16						●	●		16
20						●	●		20
25						●	●		25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WZFLN50020ZC


PRODUCT DESCRIPTION EXAMPLE
5 x 20 Cross Recess (Z) Flange Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

Plas-Fix® 45° Screws


Thread Rolling Screws for Plastic Applications

Cross Recess (Z) Flange

A2 Stainless Steel

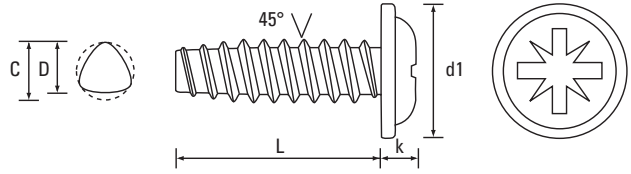

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	1.85	2.25	2.55	3.05	3.55	4.06	5.06	6.06	Dia. C max
d1 - max	-	-	-	-	6.60	8.00	9.60	12.00	d1 - max
k - max	-	-	-	-	1.60	2.00	2.30	2.90	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	1	1	2	2	2	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wzflna2								L - Length mm
4									4
5									5
6					●				6
8					●	●			8
10					●	●	●		10
12					●	●	●		12
16					●	●	●		16
20					●	●	●		20
25					●	●	●		25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSPT45WZFLN35016A2

PRODUCT DESCRIPTION EXAMPLE
3.5 x 16 Cross Recess (Z) Flange Plas-Fix® 45° Screw A2 Stainless Steel

T-Drive® (6-Lobe) Pan

Steel / Zinc Plated (CR3)

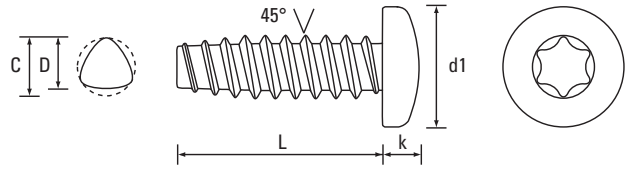

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-pt45wtxpanzc>

L - Length mm									L - Length mm
4									4
5									5
6			●	●		●			6
8			●	●	●	●			8
10				●	●	●	●		10
12				●	●	●	●		12
16				●	●	●	●		16
20						●	●		20
25					●	●	●		25
30							●		30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WTXPAN25008ZC


PRODUCT DESCRIPTION EXAMPLE
2.5 x 8 T-Drive® (6-Lobe) Pan Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

Plas-Fix® 45° Screws

Thread Rolling Screws for Plastic Applications

T-Drive® (6-Lobe) Pan

A2 Stainless Steel

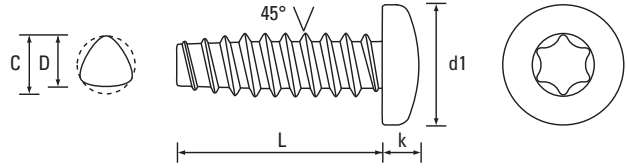

Di. D max	1.8	2.2	2.5	3	3.5	4	5	6	Di. D max
Di. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Di. C max
d1 - max	-	-	4.00	5.00	6.00	7.00	8.00	-	d1 - max
k - max	-	-	1.60	1.95	2.30	2.45	2.80	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-sspt45wtxpana2>

L - Length mm									L - Length mm
4									4
5									5
6				●	●	●			6
8				●	●	●			8
10				●	●	●			10
12				●	●	●			12
16				●	●	●			16
20				●	●	●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSPT45WTXPAN40006A2

PRODUCT DESCRIPTION EXAMPLE
 4 x 6 T-Drive® (6-Lobe) Pan Plas-Fix® 45° Screw A2 Stainless Steel

T-Drive® (6-Lobe) Countersunk

Steel / Zinc Plated (CR3)

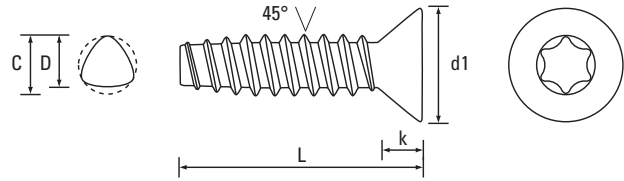

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	-	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-pt45wtxcskzc>

L - Length mm									L - Length mm
4									4
5									5
6			●	●	●				6
8			●	●		●			8
10			●	●	●	●	●		10
12				●	●	●	●		12
16					●	●	●		16
20					●	●	●		20
25						●	●		25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PT45WTXCSK25006ZC


PRODUCT DESCRIPTION EXAMPLE
2.5 x 6 T-Drive® (6-Lobe) Countersunk Plas-Fix® 45° Screw Steel / Zinc Plated (CR3)

Plas-Fix® 45° Screws


Thread Rolling Screws for Plastic Applications

T-Drive® (6-Lobe) Countersunk

A2 Stainless Steel

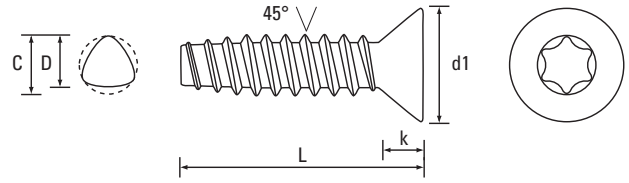

Dia. D max	1.8	2.2	2.5	3	3.5	4	5	6	Dia. D max
Dia. C max	-	-	2.55	3.05	3.55	4.06	5.06	-	Dia. C max
d1 - max	-	-	4.40	5.50	6.30	7.35	8.40	-	d1 - max
k - ref	-	-	1.30	1.50	1.65	1.90	2.20	-	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	T6	T8	T10	T15	T20	-	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-sspt45wtxcska2								L - Length mm
4									4
5									5
6				●	●				6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
16				●	●	●			16
20				●	●	●			20
25									25
30									30
35									35
40									40
-									-
-									-
-									-
-									-
-									-


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSPT45WTXCCK30020A2

PRODUCT DESCRIPTION EXAMPLE
3 x 20 T-Drive® (6-Lobe) Countersunk Plas-Fix® 45° Screw A2 Stainless Steel

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3)

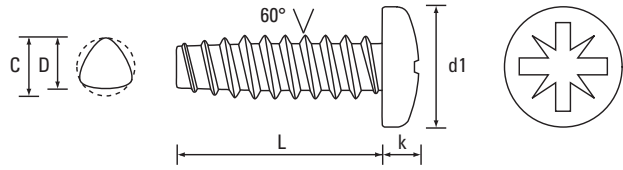

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.167	0.219	0.270	0.322	0.373	-	-	-	d1 - max ins
k - max ins	0.062	0.080	0.097	0.115	0.133	-	-	-	k - max ins
Recess	1	1	2	2	2	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ptwzpanzc>

L - Length ins									L - Length ins
3/16	●	●	●						3/16
1/4	●	●	●						1/4
5/16	●	●	●	●					5/16
3/8	●	●	●	●	●				3/8
7/16	●								7/16
1/2	●	●	●	●	●				1/2
5/8	●	●	●	●					5/8
3/4	●	●	●	●	●				3/4
1		●	●	●					1
1 1/4		●	●						1 1/4
1 3/8			●						1 3/8
1 1/2		●							1 1/2
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PTWZPAN42080ZC



PRODUCT DESCRIPTION EXAMPLE
8.16 x 5/16 Cross Recess (Z) Pan Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)

Plas-Fix® 60° Screws

Thread Rolling Screws for Plastic Applications

Cross Recess (Z) Countersunk

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

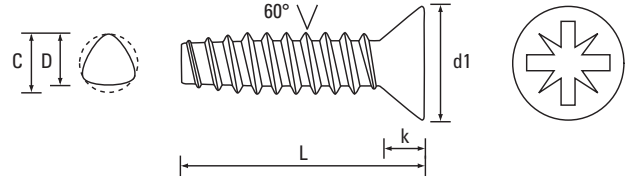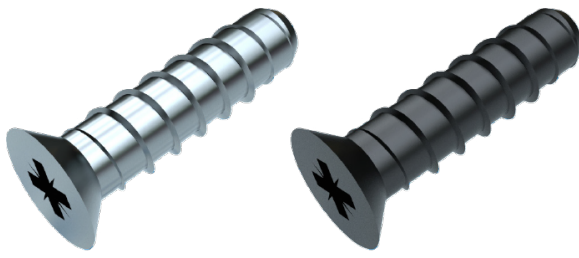

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.172	0.225	0.279	0.332	0.385	-	-	-	d1 - max ins
k - ref ins	0.051	0.067	0.083	0.100	0.116	-	-	-	k - ref ins
Recess	1	1	2	2	2	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ptwzcskzc>

L - Length ins									L - Length ins
3/16	●								3/16
1/4	●	●							1/4
5/16	●	●		●					5/16
3/8	●	●	● ●	●					3/8
7/16									7/16
1/2	●	●	●	● ●					1/2
5/8		●	●						5/8
3/4		●	●	●					3/4
1									1
1 1/4									1 1/4
1 3/8									1 3/8
1 1/2									1 1/2
-									-
-									-
-									-
-									-
-									-



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


PTWZCSK35095ZC
 PTWZCSK42130ZN

PRODUCT DESCRIPTION EXAMPLE

6.19 x 3/8 Cross Recess (Z) Countersunk Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)
 8.16 x 1/2 Cross Recess (Z) Countersunk Plas-Fix® 60° Screw Steel / Black (CR3)

Cross Recess (Z) Flange

Steel / Zinc Plated (CR3)

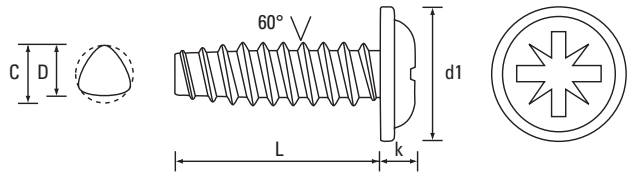

Dia. Gauge	2.28	4.20	6.19	8.16	10.14	-	-	-	Dia. Gauge
Dia. D max	0.089	0.123	0.143	0.179	0.208	-	-	-	Dia. D max
Dia. C max	0.092	0.127	0.147	0.185	0.212	-	-	-	Dia. C max
d1 - max ins	0.194	0.257	0.321	0.384	0.448	-	-	-	d1 - max ins
k - max ins	0.059	0.063	0.074	0.093	0.114	-	-	-	k - max ins
Recess	1	1	2	2	2	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ptwzflnzc>

L - Length ins	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ptwzflnzc								L - Length ins
3/16									3/16
1/4		●	●						1/4
5/16			●						5/16
3/8			●	●					3/8
7/16									7/16
1/2			●						1/2
5/8		●							5/8
3/4									3/4
1									1
1 1/4									1 1/4
1 3/8									1 3/8
1 1/2									1 1/2
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
PTWZFLN35095ZC


PRODUCT DESCRIPTION EXAMPLE
6.19 x 3/8 Cross Recess (Z) Flange Plas-Fix® 60° Screw Steel / Zinc Plated (CR3)

Thread Cutting Screws

For Plastic Applications

Cross Recess (Z) Pan Type BT BS 4174

Steel / Zinc Plated (CR3)

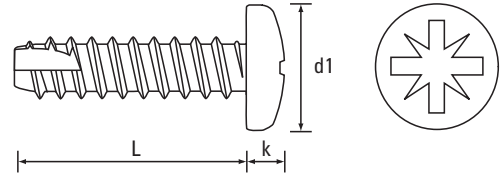

Di. mm	2.9	3.5	4.2	4.8	-	-	-	-	Di. mm
Di. Gauge	4	6	8	10	-	-	-	-	Di. Gauge
d1 - max	5.56	6.86	8.18	9.47	-	-	-	-	d1 - max
k - max	2.03	2.46	2.92	3.38	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	2	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-tcbtzpanzc>

L - Length mm									L - Length ins
4.5									3/16
6.5	●								1/4
8	●								5/16
9.5	●	●	●	●					3/8
11				●					7/16
13	●	●	●	●					1/2
16	●		●	●					5/8
19	●		●	●					3/4
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.



PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
TCBTZPAN48130ZC	4.8 x 13 Cross Recess (Z) Pan Type BT BS 4174 Thread Cutting Screw Steel / Zinc Plated (CR3)

Thread Cutting Screws

For Plastic Applications

Cross Recess (Z) Pan Type Y BS 4174

Steel / Zinc Plated (CR3)

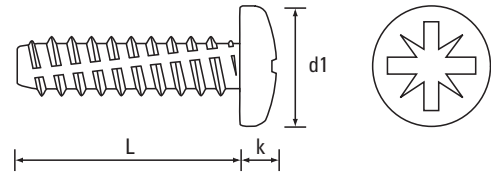

Dia. mm	2.9	3.5	4.2	-	-	-	-	-	Dia. mm
Dia. Gauge	4	6	8	-	-	-	-	-	Dia. Gauge
d1 - max	5.56	6.86	8.18	-	-	-	-	-	d1 - max
k - max	2.03	2.46	2.92	-	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	-	-	-	-	-	Recess
L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-tcyzpanzc</p>								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●						3/8
11									7/16
13	●								1/2
16									5/8
19									3/4
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TCYZPAN29130ZC



PRODUCT DESCRIPTION EXAMPLE
2.9 x 13 Cross Recess (Z) Pan Type Y BS 4174 Thread Cutting Screw Steel / Zinc Plated (CR3)

High-Low Screws

For Plastic Applications

Cross Recess (Z) Pan

Steel / Zinc Plated (CR3)

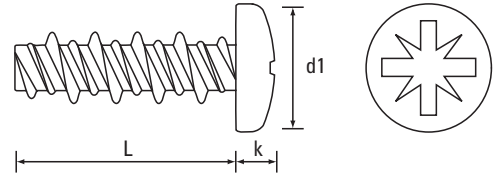

Dia. Gauge	5	6	8	10	-	-	-	-	Dia. Gauge
Dia. mm	3.18	3.68	4.32	4.95	-	-	-	-	Dia. mm
d1 - max	5.56	6.22	6.86	8.18	-	-	-	-	d1 - max
k - max	2.03	2.26	2.46	2.92	-	-	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	2	2	2	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-hlbpzpanzc>

L - Length ins									L - Length ins
5/16	●								5/16
3/8	●	●	●						3/8
7/16			●						7/16
1/2	●	●	●	●					1/2
9/16									9/16
5/8			●						5/8
3/4	●		●	●					3/4
1			●						1
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
HLBPZPAN42095ZC

PRODUCT DESCRIPTION EXAMPLE
8 x 3/8 Cross Recess (Z) Pan High-Low Screw Steel / Zinc Plated (CR3)