


Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

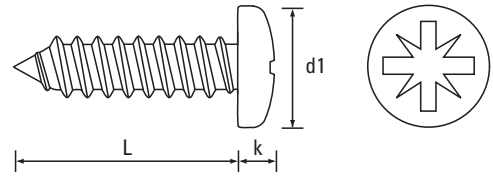

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzpanzc								L - Length ins
4.5	●	●							3/16
6.5	●	●	● ●	●	● ●				1/4
8	●	●	● ●		● ●				5/16
9.5	●	●	● ●	●	● ●	● ●			3/8
13	●	●	● ●	● ●	● ●	● ●	● ●	●	1/2
16	●	●	● ●	●	● ●	● ●	● ●	● ●	5/8
19		●	● ●	● ●	● ●	● ●	● ●	● ●	3/4
22		●	●		●	●			7/8
25		●	● ●	●	● ●	● ●	● ●	● ●	1
32		●	● ●	●	● ●	● ●	● ●	●	1 1/4
38		●	● ●	●	● ●	● ●	● ●	●	1 1/2
45			●		●	●	●	●	1 3/4
50			●		● ●	● ●	●	●	2
57					●	●		●	2 1/4
63					●	●	●	●	2 1/2
70					●	●			2 3/4
75						●	●	●	3



Steel / Zinc Plated (CR3) - preferred and available from stock.




Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZPAN42130ZC
LTABZPAN55250ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
5.5 x 25.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)

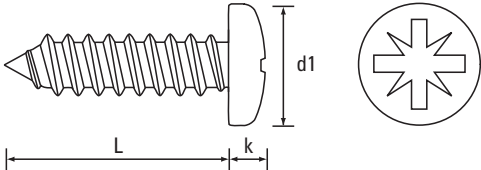
Self-Tapping Screws					Screws for Sheet Metal Applications				
Cross Recess (Z) Pan DIN 7981 Type C					A2 Stainless Steel				
									
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ssabzpana2								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●	●			●			3/8
13			●		●	●			1/2
16					●				5/8
19			●		●	●			3/4
22									7/8
25			●		●	●			1
32									1 1/4
38					●	●			1 1/2
45									1 3/4
50						●			2
57									2 1/4
63									2 1/2
70									2 3/4
75									3
● A2 Stainless Steel - preferred and available from stock.									
PRODUCT CODE EXAMPLE SSLTABZPAN35190A2					PRODUCT DESCRIPTION EXAMPLE 3.5 x 19.0 Cross Recess (Z) Pan DIN 7981 Type C Self-Tapping Screw A2 Stainless Steel				

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

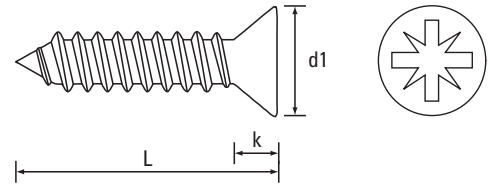

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzcskzc								L - Length ins
4.5	●								3/16
6.5	●	●	●						1/4
8	●	●	●						5/16
9.5	●	●	● ●	●	● ●				3/8
13	●	●	● ●	● ●	● ●	● ●	●		1/2
16	●	●	● ●	● ●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	●	● ●	3/4
22		●	●	●	● ●	●			7/8
25		●	● ●	●	● ●	● ●	●	● ●	1
32		●	● ●	●	● ●	● ●	●	●	1 1/4
38			● ●	●	● ●	● ●	●	●	1 1/2
45			●		● ●	● ●	●	●	1 3/4
50			●	●	● ●	● ●	●	●	2
57					●	●			2 1/4
63					●	●	●	●	2 1/2
70					●				2 3/4
75						●	●	●	3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZCSK48160ZC
 LTABZCSK35250ZN

PRODUCT DESCRIPTION EXAMPLE


4.8 x 16.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
 3.5 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type C

A2 Stainless Steel

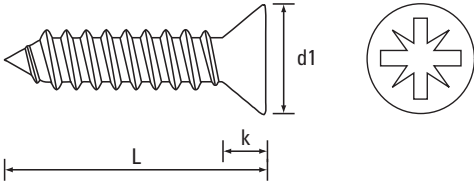Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm



Scan the QR Code to view techincal drawings for this product range

<https://www.lancasterfastener.com/drawings-for-ssabzcska2>

L - Length ins

4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13		●	●		●				1/2
16			●		●				5/8
19			●		●	●			3/4
22									7/8
25			●		●	●			1
32					●				1 1/4
38					●	●			1 1/2
45									1 3/4
50					●				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

●

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSLTABZCSK35190A2

PRODUCT DESCRIPTION EXAMPLE

3.5 x 19.0 Cross Recess (Z) Countersunk DIN 7982 Type C Self-Tapping Screw A2 Stainless Steel

78

E. & O. E.


© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

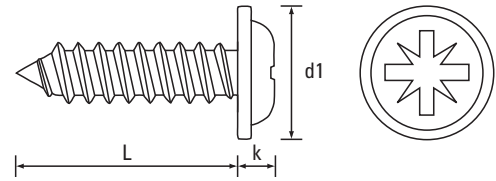

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzflnzc								L - Length ins
4.5									3/16
6.5		●	● ●		●				1/4
8		●	● ●		● ●				5/16
9.5		●	● ●	● ●	● ●	● ●			3/8
13		●	● ●	● ●	● ●	● ●	●		1/2
16		●	● ●	● ●	● ●	● ●	● ●		5/8
19		●	● ●	●	● ●	● ●	●		3/4
22									7/8
25			● ●		● ●	● ●	● ●		1
32			● ●		● ●	● ●	●		1 1/4
38			● ●		● ●	● ●			1 1/2
45					●	●			1 3/4
50					● ●				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZFLN55320ZC
LTABZFLN42160ZN

PRODUCT DESCRIPTION EXAMPLE


5.5 x 32.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 16.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type C

A2 Stainless Steel

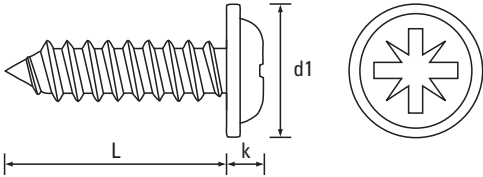Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssabzflna2>

L - Length ins

4.5									3/16
6.5									1/4
8									5/16
9.5					●				3/8
13			●		●				1/2
16					●	●			5/8
19					●	●			3/4
22									7/8
25					●	●	●		1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

●

A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE

SSLTABZFLN42130A2

PRODUCT DESCRIPTION EXAMPLE


4.2 x 13.0 Cross Recess (Z) Flange BS 4174 Type C Self-Tapping Screw A2 Stainless Steel

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Raised Countersunk DIN 7983 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabzrsdzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5		●	●						3/8
13		●	● ●	●	● ●	●			1/2
16		●	● ●	●	● ●	●			5/8
19		●	● ●	●	● ●	●	●		3/4
22			●	●	●				7/8
25		●	● ●	●	● ●	● ●			1
32			● ●	●	●	● ●	●		1 1/4
38			●		●	●	●		1 1/2
45					● ●	●			1 3/4
50					●	●	●		2
57									2 1/4
63									2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABZRS55190ZC
LTABZRS35320ZN

PRODUCT DESCRIPTION EXAMPLE

5.5 x 19.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 32.0 Cross Recess (Z) Raised Countersunk DIN 7983 Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Washer Pan with Earthing Nibs

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.50	-	8.50	-	-	-	d1 - max
d2 - ref	-	-	7.00	-	7.00	-	-	-	d2 - ref
k - max	-	-	2.60	-	2.60	-	-	-	k - max
Recess	-	-	2	-	2	-	-	-	Recess

L - Length mm

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-enabzwpnzc>

L - Length ins

4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13									1/2
16									5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

Steel / Zinc Plated (CR3) - preferred and available from stock.

Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

ENABZWP42130ZC

ENABZWP35095ZN

PRODUCT DESCRIPTION EXAMPLE

4.2 x 13.0 Cross Recess (Z) Washer Pan with Earthing Nibs Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


3.5 x 9.5 Cross Recess (Z) Washer Pan with Earthing Nibs Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (H) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

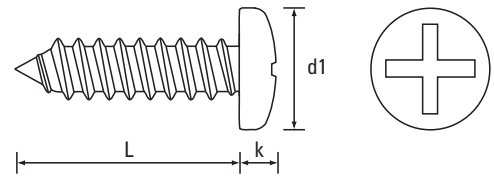

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabhpanzc								L - Length ins
4.5	●								3/16
6.5	●	●	● ●	● ●	●				1/4
8									5/16
9.5	●	●	● ●	● ●	● ●	● ●			3/8
13	●	●	● ●	● ●	● ●	●	●	●	1/2
16	●	●	● ●	● ●	● ●	● ●	●	●	5/8
19		●	●	●	● ●	● ●	●	●	3/4
22		●	●	●	●	●	●	●	7/8
25		●	●	●	● ●	●	●	●	1
32		●	●	●	●	●	●	●	1 1/4
38		●	●	● ●	●	● ●	●	●	1 1/2
45				●	●	●	●	●	1 3/4
50			●		●	●	●	●	2
57									2 1/4
63								●	2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.




Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABHPAN35130ZC
LTABHPAN42190ZN

PRODUCT DESCRIPTION EXAMPLE

3.5 x 13.0 Cross Recess (H) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
4.2 x 19.0 Cross Recess (H) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)

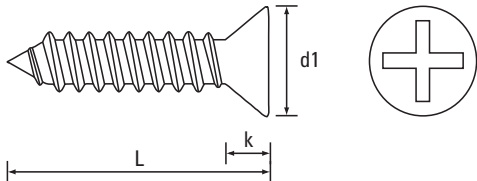
Self-Tapping Screws										Screws for Sheet Metal Applications	
Cross Recess (H) Countersunk DIN 7982 Type C						Steel / Zinc Plated (CR3) & Steel / Black (CR3)					
											
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm		
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge		
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max		
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref		
s - A/F	-	-	-	-	-	-	-	-	s - A/F		
Recess	1	1	2	2	2	2	3	3	Recess		
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabhcskzc								L - Length ins		
4.5									3/16		
6.5	●	●							1/4		
8									5/16		
9.5	●	●	● ●	●	●				3/8		
13	●	●	●	●	● ●	●	●		1/2		
16		●	● ●	●	●	●	●		5/8		
19		●	●	●	● ●	●	●	●	3/4		
22			●	●	●	●			7/8		
25		●	● ●	●	●	●	●	●	1		
32			●	●	●	●	●	●	1 1/4		
38				●	●	●	●	●	1 1/2		
45						●	●		1 3/4		
50					●	●	●	●	2		
57									2 1/4		
63						●			2 1/2		
70						●			2 3/4		
75									3		
● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.											
PRODUCT CODE EXAMPLE					PRODUCT DESCRIPTION EXAMPLE						
LTABHCSK42160ZC					4.2 x 16.0 Cross Recess (H) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)						
LTABHCSK35095ZN					3.5 x 9.5 Cross Recess (H) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)						

Self-Tapping Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7981 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

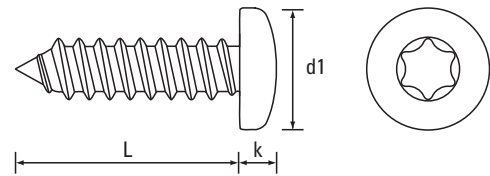

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabtxpanzc								L - Length ins
4.5									3/16
6.5	●	●	●		● ●				1/4
8		●	●						5/16
9.5		●	● ●	●	● ●	●			3/8
13		●	● ●	●	● ●	● ●	●	●	1/2
16		●	● ●	●	● ●	● ●	●	●	5/8
19		●	● ●	●	● ●	● ●	● ●	●	3/4
22			● ●	●	●				7/8
25		●	● ●	●	● ●	● ●	● ●	●	1
32		●	●	●	● ●	●		●	1 1/4
38			●	●	● ●	●		●	1 1/2
45						●			1 3/4
50					●	●			2
57									2 1/4
63									2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABTXPAN48190ZC
LTABTXPAN35160ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 19.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 16.0 T-Drive® (6-Lobe) Pan DIN 7981 Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Countersunk DIN 7982 Type C

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess

L - Length mm

Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ltabtxcsczkc>

L - Length ins

L - Length mm	4.5	6.5	8	9.5	13	16	19	22	25	32	38	45	50	57	63	70	75	L - Length ins
																		3/16
																		1/4
																		5/16
				●	●													3/8
		●	●	●	●	●	●		●	●								1/2
		●	●	●	●	●	●		●	●								5/8
		●	●	●	●	●	●		●	●								3/4
																		7/8
				●					●	●								1
									●	●						●		1 1/4
									●	●						●		1 1/2
																		1 3/4
																●		2
																		2 1/4
																		2 1/2
																		2 3/4
																		3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABTXCSK48380ZC

LTABTXCSK35160ZN

PRODUCT DESCRIPTION EXAMPLE

4.8 x 38.0 T-Drive® (6-Lobe) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)



3.5 x 16.0 T-Drive® (6-Lobe) Countersunk DIN 7982 Type C Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C

Steel / Zinc Plated (CR3)

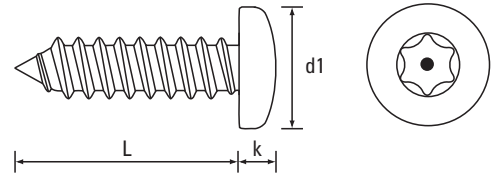

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T27	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabpndrpanzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●						3/8
13			●			●			1/2
16			●			●			5/8
19			●						3/4
22									7/8
25					●				1
32						●			1 1/4
38						●			1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTABPNDPAN48130ZC


PRODUCT DESCRIPTION EXAMPLE
4.8 x 13.0 Pin T-Drive® (6-Lobe) Pan DIN 7981 SIMILAR Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Pin T-Drive® (6-Lobe) Countersunk DIN 7982 SIMILAR Type C

Steel / Zinc Plated (CR3)

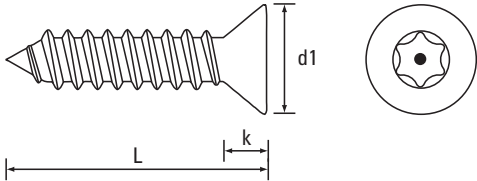Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T8	T10	T15	T20	T25	T25	T30	Recess

L - Length mm



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ltabpndrcskzc>

L - Length ins

4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13					●				1/2
16									5/8
19					●				3/4
22									7/8
25					●				1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

●

Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTABPNDRCSK35160ZC

PRODUCT DESCRIPTION EXAMPLE



3.5 x 16.0 Pin T-Drive® (6-Lobe) Countersunk DIN 7982 SIMILAR Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Slotted Pan DIN 7971 Type C

Steel / Zinc Plated (CR3)

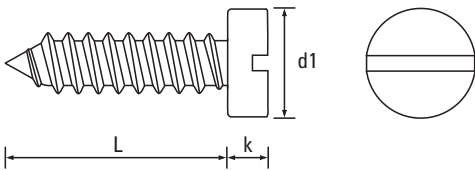


Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.35	1.75	2.10	2.25	2.45	2.80	3.20	3.65	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabslpanzc								L - Length ins
4.5									3/16
6.5	●	●	●						1/4
8		●							5/16
9.5	●	●	●	●	●	●			3/8
13		●	●		●	●	●		1/2
16		●	●	●	●	●	●	●	5/8
19		●	●	●	●	●	●	●	3/4
22									7/8
25		●	●	●	●	●	●	●	1
32			●	●	●	●	●	●	1 1/4
38					●			●	1 1/2
45									1 3/4
50					●			●	2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTABSLPAN63500ZC

PRODUCT DESCRIPTION EXAMPLE
6.3 x 50.0 Slotted Pan DIN 7971 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)


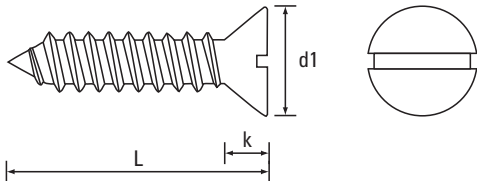
Self-Tapping Screws										Screws for Sheet Metal Applications	
Slotted Countersunk DIN 7972 Type C										Steel / Zinc Plated (CR3)	
											
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm		
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge		
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max		
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref		
s - A/F	-	-	-	-	-	-	-	-	s - A/F		
Recess	-	-	-	-	-	-	-	-	Recess		
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltbslcskzc								L - Length ins		
4.5									3/16		
6.5									1/4		
8									5/16		
9.5		●							3/8		
13		●	●		●	●			1/2		
16		●	●			●			5/8		
19		●	●	●	●				3/4		
22									7/8		
25		●	●			●			1		
32			●						1 1/4		
38			●			●			1 1/2		
45									1 3/4		
50					●				2		
57									2 1/4		
63									2 1/2		
70									2 3/4		
75									3		
● Steel / Zinc Plated (CR3) - preferred and available from stock.											
PRODUCT CODE EXAMPLE				PRODUCT DESCRIPTION EXAMPLE							
LTABSLCSK48380ZC				4.8 x 38.0 Slotted Countersunk DIN 7972 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)							

Self-Tapping Screws

Screws for Sheet Metal Applications

Slotted Raised Countersunk DIN 7973 Type C

Steel / Zinc Plated (CR3)

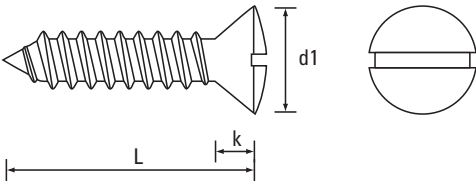



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltbslrdsdc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5									3/8
13		●	●			●			1/2
16		●	●		●	●			5/8
19		●	●		●	●			3/4
22									7/8
25		●	●		●	●			1
32			●		●	●			1 1/4
38			●		●	●	●		1 1/2
45									1 3/4
50					●				2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTBSLRSD29250ZC

PRODUCT DESCRIPTION EXAMPLE
2.9 x 25.0 Slotted Raised Countersunk DIN 7973 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

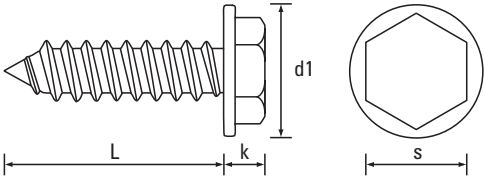Self-Tapping Screws					Screws for Sheet Metal Applications				
Washer Hexagon DIN 6928 Type C					Steel / Zinc Plated (CR3)				
									
Dia. mm	2.2	2.9	3.5	3.5*	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	6	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	-	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	-	4.10	4.30	5.40	5.90	k - max
s - A/F max	-	-	5.50	1/4"	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabwhxzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5				●	●				3/8
13				●	●	●	●	●	1/2
16					●	●	●	●	5/8
19					●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32								●	1 1/4
38								●	1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

* Not to DIN 6928

PRODUCT CODE EXAMPLE

LTABWHX55160ZC

PRODUCT DESCRIPTION EXAMPLE



5.5 x 16.0 Washer Hexagon DIN 6928 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Hexagon DIN 7976 Type C

Steel / Zinc Plated (CR3)

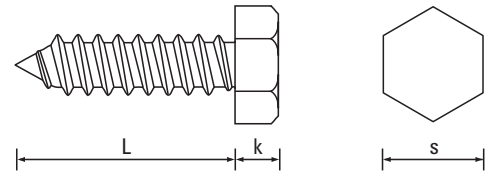



Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltabhexzc								L - Length ins
4.5									3/16
6.5									1/4
8									5/16
9.5			●		●	●			3/8
13			●		●	●	●	●	1/2
16					●	●	●	●	5/8
19			●		●	●	●	●	3/4
22									7/8
25					●	●	●	●	1
32							●	●	1 1/4
38						●	●	●	1 1/2
45								●	1 3/4
50							●	●	2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTABHEX63190ZC

PRODUCT DESCRIPTION EXAMPLE
6.3 x 19.0 Hexagon DIN 7976 Type C Self-Tapping Screw Steel / Zinc Plated (CR3)

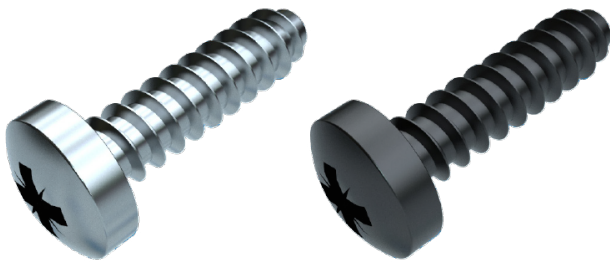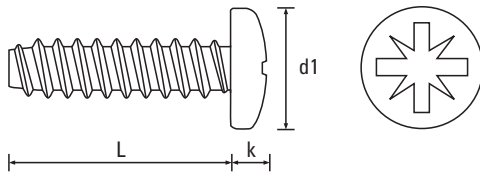
Self-Tapping Screws										Screws for Sheet Metal Applications											
Cross Recess (Z) Pan DIN 7981 Type F										Steel / Zinc Plated (CR3) & Steel / Black (CR3)											
																					
Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm												
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge												
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max												
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max												
s - A/F	-	-	-	-	-	-	-	-	s - A/F												
Recess	1	1	2	2	2	2	3	3	Recess												
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltbzpanzc										L - Length ins										
3.0	●									1/8											
4.5	●	●	●							3/16											
6.5	●	●	● ●	●	● ●	●				1/4											
8	●	●	●		●	●				5/16											
9.5	●	●	● ●	●	● ●	●				3/8											
13	●	●	● ●	●	● ●	●	●	●		1/2											
16		●	● ●	●	● ●	●	●			5/8											
19		●	●		●	●	●			3/4											
22			●			●				7/8											
25		●	●		●	●	●			1											
32		●	●		●	●				1 1/4											
38										1 1/2											
45										1 3/4											
50										2											
57										2 1/4											
63										2 1/2											
70										2 3/4											
● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.																					
PRODUCT CODE EXAMPLE										PRODUCT DESCRIPTION EXAMPLE											
LTBZPAN22095ZC										2.2 x 9.5 Cross Recess (Z) Pan Din 7981 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)											
LTBZPAN42065ZC										4.2 x 6.5 Cross Recess (Z) Pan Din 7981 Type F Self-Tapping Screw Steel / Black (CR3)											

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Countersunk DIN 7982 Type F

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

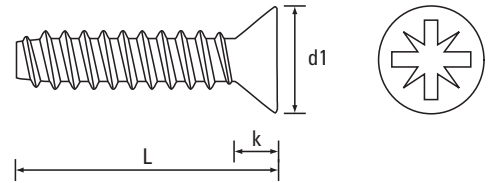

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.30	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	1.30	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltbzcskzc								L - Length ins
4.5	●								3/16
6.5	●	●	●						1/4
8	●	●							5/16
9.5	●	●	● ●		●				3/8
13	●	●	●		●	●			1/2
16		●	●		●	●			5/8
19			●		●	●			3/4
22									7/8
25			●		●	●			1
32								●	1 1/4
38								●	1 1/2
45							●	●	1 3/4
50								●	2
57								●	2 1/4
63								●	2 1/2
70									2 3/4
75									3



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTBZCSK42250ZC
LTBZCSK35095ZC

PRODUCT DESCRIPTION EXAMPLE


4.2 x 25.0 Cross Recess (Z) Countersunk DIN 7982 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)
3.5 x 9.5 Cross Recess (Z) Countersunk DIN 7982 Type F Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Cross Recess (Z) Flange BS 4174 Type F

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

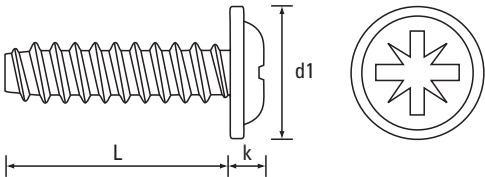Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	6.53	8.15	8.90	9.75	11.38	13.00	14.55	d1 - max
k - max	-	1.60	1.88	2.00	2.36	2.90	3.15	3.68	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	2	2	2	2	3	3	Recess

L - Length mm



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ltbzflnzc>

L - Length ins

3.0									1/8
4.5									3/16
6.5		●	● ●		●				1/4
8			●		● ●				5/16
9.5		●	●		●	●			3/8
13					● ●	● ●			1/2
16					● ●	●			5/8
19					●				3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTBZFLN42160ZC

LTBZFLN35064ZC

PRODUCT DESCRIPTION EXAMPLE

4.2 x 16.0 Cross Recess (Z) Flange BS 4174 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)



3.5 x 6.5 Cross Recess (Z) Flange BS 4174 Type F Self-Tapping Screw Steel / Black (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7981 Type F

Steel / Zinc Plated (CR3)

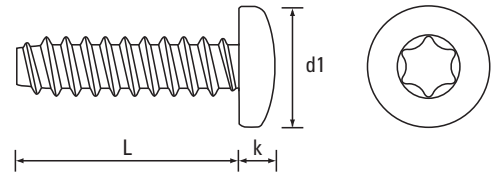

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	4.20	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	1.80	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T8	T10	T15	T15	T20	T25	T25	T30	Recess
L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ltbtspanzc								L - Length ins
4.5									3/16
6.5		●	●		●				1/4
8									5/16
9.5		●	●		●	●			3/8
13			●		●	●	●		1/2
16					●	●			5/8
19									3/4
22									7/8
25									1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
57									2 1/4
63									2 1/2
70									2 3/4
75									3

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
LTBTXPAN55130ZC



PRODUCT DESCRIPTION EXAMPLE
5.5 x 13.0 T-Drive® (6-Lobe) Pan DIN 7981 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)

Self-Tapping Screws

Screws for Sheet Metal Applications

Hexagon DIN 7976 Type F

Steel / Zinc Plated (CR3)

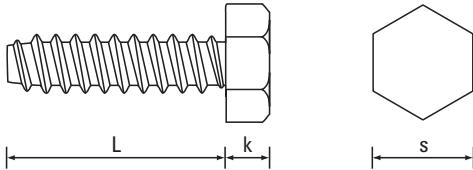Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	-	-	-	-	d1 - max
k - nom	1.30	1.50	2.30	2.30	2.80	3.00	4.00	4.80	k - nom
s - A/F max	3.20	5.00	5.50	7.00	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm



L - Length ins

Scan the QR Code to view technical drawings for this product range

<https://www.lancasterfastener.com/drawings-for-ltbhexzc>

L - Length mm	3.0	4.5	6.5	8	9.5	13	16	19	22	25	32	38	45	50	57	63	70	L - Length ins
																		1/8
																		3/16
																		1/4
																		5/16
																		3/8
																		1/2
																		5/8
																		3/4
																		7/8
																		1
																		1 1/4
																		1 1/2
																		1 3/4
																		2
																		2 1/4
																		2 1/2
																		2 3/4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

LTBHEX63160ZC

PRODUCT DESCRIPTION EXAMPLE

6.3 x 16.0 Hexagon DIN 7976 Type F Self-Tapping Screw Steel / Zinc Plated (CR3)

98

E. & O. E.

© 2026, Lancaster Fastener Co Ltd. All images are copyright protected.