

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	5.60	7.00	8.00	9.50	12.00	16.00	d1 - max
k - max	1.60	2.10	2.40	2.60	3.10	3.70	4.60	6.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	2	2	2	3	4	Recess




Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttiwzpanzc>

L - Length mm									L - Length mm
4									4
5			●						5
6			●		●				6
8			●		●	●			8
10			●		●	●	●		10
12			●		●	●	●		12
14					●				14
16			●		●	●	●		16
18									18
20			●		●	●	●		20
25					●	●			25
30			●		●	●	●		30
35						●			35
40						●			40
45									45
50									50
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTIWZPAN40016ZC

PRODUCT DESCRIPTION EXAMPLE
M4 x 16 Cross Recess (Z) Pan DIN 7500 FORM CE ISO 7045 Tap-Fix® Screw Steel / Zinc Plated (CR3)

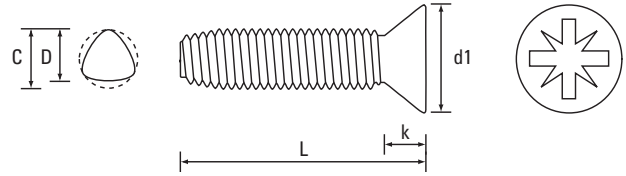

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.50	7.30	8.40	9.30	11.30	15.80	d1 - max
k - ref	1.20	1.50	1.65	2.35	2.70	2.70	3.30	4.65	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	0	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttiwzcskzc>

L - Length mm									L - Length mm
4									4
5									5
6			●						6
8			●		●	●			8
10			●		●	●	●		10
12			●		●	●	●		12
14									14
16			●		●	●	●		16
18									18
20					●	●	●		20
25					●	●	●		25
30					●		●		30
35							●		35
40									40
45									45
50									50
-									-


● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTIWZCSK30006ZC

PRODUCT DESCRIPTION EXAMPLE
M3 x 6 Cross Recess (Z) Countersunk DIN 7500 FORM ME ISO 7046-2 Tap-Fix® Screw Steel / Zinc Plated (CR3)

T-Drive® (6-Lobe) Pan FORM PE ISO 14583

Steel / Zinc Plated (CR3)

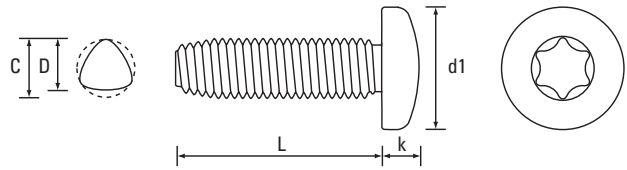

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	5.60	7.00	8.00	9.50	12.00	16.00	d1 - max
k - max	1.60	2.10	2.40	2.60	3.10	3.70	4.60	6.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T45	Recess




Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttiwtspanzc>

L - Length mm									L - Length mm
4									4
5			●		●				5
6			●		●	●			6
8			●		●	●	●		8
10			●		●	●	●		10
12			●		●	●	●		12
14					●				14
16			●		●	●	●		16
18									18
20			●		●	●	●		20
25			●		●	●	●		25
30			●		●	●	●		30
35						●	●		35
40					●	●	●		40
45									45
50									50
-									-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTIWTXPAN40020ZC

PRODUCT DESCRIPTION EXAMPLE
M4 x 20 T-Drive® (6-Lobe) Pan DIN 7500 FORM PE ISO 14583 Tap-Fix® Screw Steel / Zinc Plated (CR3)

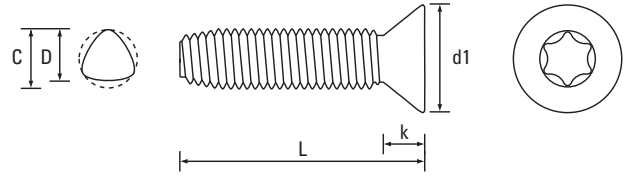

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.50	7.30	8.40	9.30	11.30	15.80	d1 - max
k - ref	1.20	1.50	1.65	2.35	2.70	2.70	3.30	4.65	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T45	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttiwtxcskzc>

L - Length mm									L - Length mm
4									4
5									5
6			●		●				6
8			●		●	●			8
10			●		●	●	●		10
12			●		●	●	●		12
14									14
16			●		●	●	●		16
18									18
20			●		●	●	●		20
25						●	●		25
30						●	●		30
35						●			35
40							●		40
45									45
50									50
-									-


● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTIWTXCSK60012ZC

PRODUCT DESCRIPTION EXAMPLE
M6 x 12 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM ME ISO 14581 Tap-Fix® Screw Steel / Zinc Plated (CR3)

Cross Recess (Z) Pan FORM C DIN 7985

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

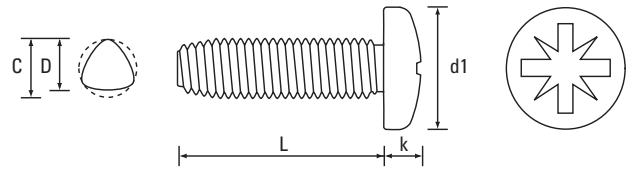

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwzpanzc>

L - Length mm										L - Length mm
4	●	●	●							4
5	●	●	●							5
6	●	●	● ●	●	● ●	●				6
8	●	●	● ●	●	● ●	●	●			8
10	●	●	●	●	● ●	●	●			10
12			●	●	● ●	●	●			12
14		●	●							14
16		●	●	●	●	●	●			16
18										18
20			●	●	● ●	●	●	●		20
25			●	●	●	●	●			25
30			●		●	●	●			30
35					●	●	●			35
40					●	●	●			40
45										45
50							●			50
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWZPAN40010ZC
 TTMWZPAN30008ZN

PRODUCT DESCRIPTION EXAMPLE


M4 x 10 Cross Recess (Z) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M3 x 8 Cross Recess (Z) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Black (CR3)

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Cross Recess (Z) Pan FORM C DIN 7985

A2 Stainless Steel

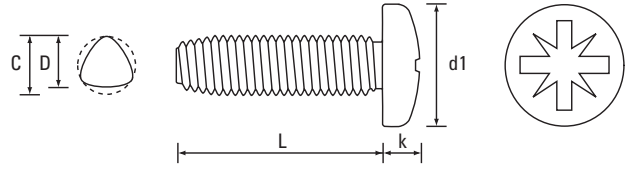

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssttmwzpana2>

L - Length mm									L - Length mm
4									4
5			●						5
6			●		●	●			6
8			●		●	●	●		8
10			●		●	●			10
12			●		●	●	●		12
14									14
16			●		●	●	●		16
18									18
20					●	●	●		20
25			●		●	●	●		25
30						●	●		30
35							●		35
40							●		40
45									45
50									50
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSTTMWZPAN50012A2


PRODUCT DESCRIPTION EXAMPLE
M5 x 12 Cross Recess (Z) Pan DIN 7500 FORM C Tap-Fix® Screw A2 Stainless Steel

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Cross Recess (Z) Countersunk FORM M DIN 965

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

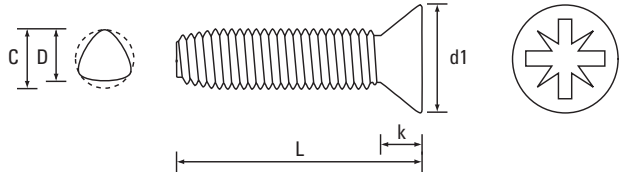

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwzcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwzcskzc									L - Length mm
4										4
5										5
6		●	● ●	●	●					6
8		●	● ●	●	●	●				8
10		●	●	●	● ●	●	●			10
12			●	●	●	●	● ●	●		12
14										14
16			●	●	●	●	●	●		16
18										18
20			●		●	●	●	●	●	20
25			●		●	●	●	●	●	25
30					●	●	●	●	●	30
35							●			35
40						●	●	●		40
45							●			45
50							●	●		50
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWZCSK25006ZC
 TTMWZCSK40010ZN

PRODUCT DESCRIPTION EXAMPLE


M2.5 x 6 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M4 x 10 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Black (CR3)

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Cross Recess (Z) Countersunk FORM M DIN 965

A2 Stainless Steel

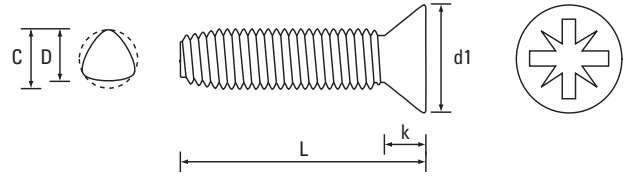

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	1	1	1	2	2	2	3	4	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssttmwzcska2>

L - Length mm									L - Length mm
4									4
5									5
6			●			●			6
8			●		●	●	●		8
10					●	●			10
12			●		●		●		12
14									14
16			●		●	●	●		16
18									18
20			●		●	●	●		20
25			●		●	●	●		25
30						●	●		30
35							●		35
40							●		40
45									45
50									50
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSTTMWZCSK50010A2


PRODUCT DESCRIPTION EXAMPLE
M5 x 10 Cross Recess (Z) Countersunk DIN 7500 FORM M Tap-Fix® Screw A2 Stainless Steel

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Pan FORM C DIN 7985

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

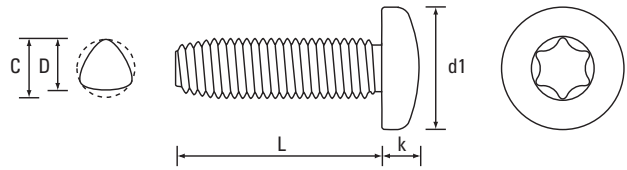

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwtxpanzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwtxpanzc									L - Length mm
4	●	●	●							4
5		●	●							5
6	●	●	● ●	●	●	● ●				6
8	●	●	● ●	●	● ●	●	●			8
10		●	● ●	●	● ●	● ●	● ●			10
12	●	●	● ●	●	● ●	● ●	● ●	●		12
14			●		●					14
16		●	●		● ●	● ●	● ●			16
18						●				18
20			● ●		●	● ●	●	●		20
25			●		●	●	● ●	●		25
30			●		●	●	●	●		30
35					●	●	●			35
40						●	●			40
45										45
50							●			50
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock.

● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWTXPAN40020ZC
 TTMWTXPAN50016ZN

PRODUCT DESCRIPTION EXAMPLE


M4 x 20 T-Drive® (6-Lobe) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M5 x 16 T-Drive® (6-Lobe) Pan DIN 7500 FORM C Tap-Fix® Screw Steel / Black (CR3)

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Pan FORM C DIN 7985

A2 Stainless Steel

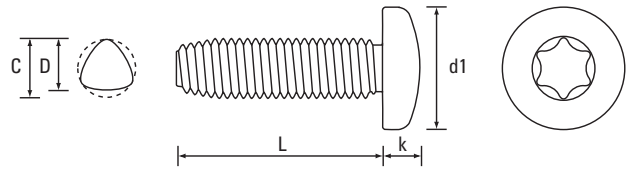

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	4.00	5.00	6.00	7.00	8.00	10.00	12.00	16.00	d1 - max
k - max	1.72	2.12	2.52	2.82	3.25	3.95	4.75	6.15	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssttmwtxpana2>

L - Length mm									L - Length mm
4									4
5			●						5
6			●		●				6
8			●		●	●	●		8
10			●		●	●	●		10
12			●		●	●	●		12
14									14
16			●		●	●	●		16
18									18
20			●		●	●	●	●	20
25			●		●	●	●		25
30						●	●		30
35							●		35
40							●		40
45									45
50									50
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSTTMWTXPAN50010A2


PRODUCT DESCRIPTION EXAMPLE
 M5 x 10 T-Drive® (6-Lobe) Pan DIN 7500 FORM C Tap-Fix® Screw A2 Stainless Steel

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

T-Drive® (6-Lobe) Countersunk FORM M DIN 965

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

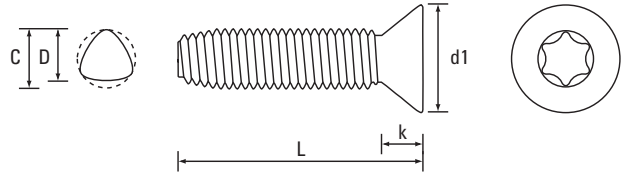

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwtxcskzc>

L - Length mm	Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwtxcskzc									L - Length mm
4			●							4
5			●							5
6	●	●	● ●		●					6
8		●	● ●		● ●	● ●				8
10		●	● ●		● ●	● ●	●			10
12			● ●		● ●	●	●			12
14										14
16					●	●	● ●	●		16
18										18
20					●	●	● ●	●		20
25			● ●		●	●	●	●		25
30			●		●	●	●	●		30
35					●					35
40							●	●		40
45										45
50							●	●		50
-										-

● Steel / Zinc Plated (CR3) - preferred and available from stock.


● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE

TTMWTXCSK60012ZC
 TTMWTXCSK40012ZN

PRODUCT DESCRIPTION EXAMPLE

M6 x 12 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Zinc Plated (CR3)
 M4 x 12 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw Steel / Black (CR3)

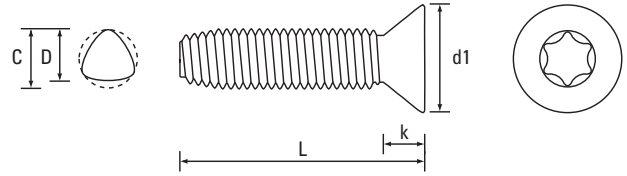

Dia. D	M2	M2.5	M3	M3.5	M4	M5	M6	M8	Dia. D
Dia. C max	2.06	2.57	3.07	3.58	4.08	5.09	6.10	8.13	Dia. C max
d1 - max	3.80	4.70	5.60	6.50	7.50	9.20	11.00	14.50	d1 - max
k - ref	1.20	1.50	1.65	1.93	2.20	2.50	3.00	4.00	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	T6	T8	T10	T15	T20	T25	T30	T40	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssttmwtxcska2>

L - Length mm									L - Length mm
4									4
5									5
6			●		●				6
8			●		●	●	●		8
10			●		●	●	●		10
12			●		●	●	●		12
14									14
16					●	●	●		16
18									18
20			●		●	●	●		20
25			●		●	●	●		25
30							●		30
35							●		35
40							●		40
45									45
50									50
-									-

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
 SSTTMWTXCSK30025A2


PRODUCT DESCRIPTION EXAMPLE
 M3 x 25 T-Drive® (6-Lobe) Countersunk DIN 7500 FORM M Tap-Fix® Screw A2 Stainless Steel

DIN 7500 Tap-Fix® Screws


Thread Rolling Screws for Metal Applications

Washer Hexagon FORM D / DE SIMILAR

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

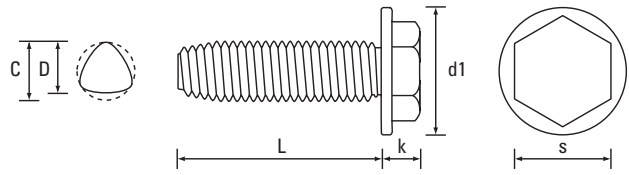

Dia. D	-	M3	M4	M4	M5	M6	M8	M10	Dia. D
Dia. C max	-	3.07	4.08	4.08	5.09	6.10	8.13	10.15	Dia. C max
d1 - max	-	6.30	8.30	8.80	10.40	13.00	16.90	22.10	d1 - max
k - max	-	2.40	3.50	4.10	4.50	5.20	7.00	9.00	k - max
s - A/F	-	5.00	5.50	7.00	8.00	10.00	13.00	17.00	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwwhxzc									L - Length mm
	4									
5										5
6		●		●						6
8		●		●	● ●					8
10		●	●	●	● ●	●				10
12		●	●	●	● ●	●	●			12
14										14
16			●	●	● ●	● ●	●	●		16
18										18
20		●	●	●	●	●	●	●		20
25					●	●	●	●		25
30					●	●	●	●		30
35						●	●			35
40						●	●	●		40
45										45
50						●	●	●		50
60							●			60


● Steel / Zinc Plated (CR3) - preferred and available from stock. ● Steel / Black (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTMWWHX99030ZC
TTMWWHX60020ZN

PRODUCT DESCRIPTION EXAMPLE
M10 x 30 Washer Hexagon DIN 7500 FORM D / DE SIMILAR Tap-Fix® Screw Steel / Zinc Plated (CR3)
M6 x 20 Washer Hexagon DIN 7500 FORM D / DE SIMILAR Tap-Fix® Screw Steel / Black (CR3)

Washer Hexagon FORM D / DE SIMILAR

A2 Stainless Steel

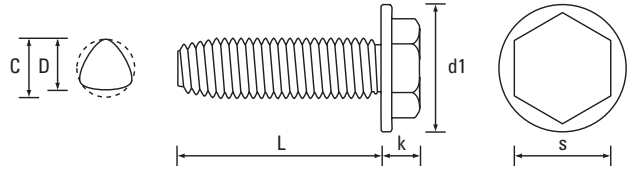

Dia. D	-	M3	M4	M4	M5	M6	M8	M10	Dia. D
Dia. C max	-	3.07	4.08	4.08	5.09	6.10	8.13	10.15	Dia. C max
d1 - max	-	6.30	8.30	8.80	10.40	13.00	16.90	22.10	d1 - max
k - max	-	2.40	3.50	4.10	4.50	5.20	7.00	9.00	k - max
s - A/F	-	5.00	5.50	7.00	8.00	10.00	13.00	17.00	s - A/F
Recess	-	-	-	-	-	-	-	-	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ssttmwhxa2>

L - Length mm									L - Length mm
4									4
5									5
6									6
8									8
10						●			10
12					●	●			12
14									14
16					●	●	●		16
18									18
20					●	●	●		20
25							●		25
30						●	●		30
35									35
40									40
45									45
50							●		50
60								●	60


● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE
SSTTMWWHX50012A2


PRODUCT DESCRIPTION EXAMPLE
M5 x 12 Washer Hexagon DIN 7500 FORM D / DE SIMILAR Tap-Fix® Screw A2 Stainless Steel

T-Drive® (6-Lobe) Socket Cap FORM E / EE SIMILAR

Steel / Zinc Plated (CR3)

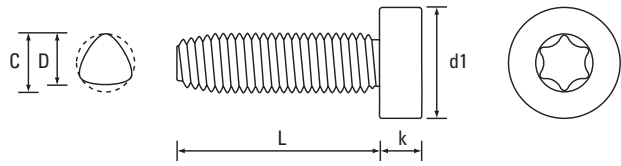

Dia. D	-	-	-	M4	M5	M6	M8	M10	Dia. D
Dia. C max	-	-	-	4.08	5.09	6.10	8.13	10.15	Dia. C max
d1 - max	-	-	-	7.00	8.50	10.00	13.00	16.00	d1 - max
k - max	-	-	-	4.00	5.00	6.00	8.00	10.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	T20	T25	T30	T40	T50	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttmwtxsckcapzc</p>									L - Length mm
4										4
5										5
6										6
8										8
10				●						10
12				●		●				12
14										14
16				●		●				16
18										18
20				●		●				20
25					●	●				25
30						●				30
35										35
40										40
45										45
50										50
60										60

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTMWTXSCKCAP50025ZC



PRODUCT DESCRIPTION EXAMPLE
M5 x 25 T-Drive® (6-Lobe) Socket Cap DIN 7500 FORM E / EE SIMILAR Tap-Fix® Screw Steel / Zinc Plated (CR3)

DIN 7500 Tap-Fix® Screws

Thread Rolling Screws for Metal Applications

Hexagon Socket Cap FORM E DIN 912 / EE ISO 4762

Steel / Zinc Plated (CR3)

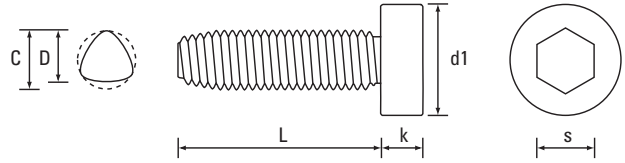

Dia. D	-	-	-	M4	M5	M6	M8	M10	Dia. D
Dia. C max	-	-	-	4.08	5.09	6.10	8.13	10.15	Dia. C max
d1 - max	-	-	-	7.00	8.50	10.00	13.00	16.00	d1 - max
k - max	-	-	-	4.00	5.00	6.00	8.00	10.00	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	3.00	4.00	5.00	6.00	8.00	Recess



Scan the QR Code to view technical drawings for this product range
<https://www.lancasterfastener.com/drawings-for-ttmwhexsckcapzc>

L - Length mm									L - Length mm
4									4
5									5
6									6
8				●	●				8
10				●	●	●			10
12				●	●	●			12
14									14
16				●	●	●	●		16
18									18
20				●	●	●	●		20
25				●	●	●	●		25
30					●	●	●		30
35						●			35
40						●	●		40
45									45
50						●	●		50
60									60

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE


TTMWHXSCKCAP40012ZC


PRODUCT DESCRIPTION EXAMPLE

M4 x 12 Hexagon Socket Cap DIN 7500 FORM E DIN 912 / EE ISO 4762 Tap-Fix® Screw Steel / Zinc Plated (CR3)

Cross Recess (Z) Pan ANSI B18.6.4

Steel / Zinc Plated (CR3)

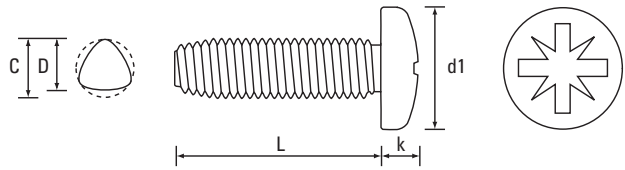

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	1/4" - 20 UNC	Dia.
Dia. D	0.084	1.109	0.135	0.161	0.185	0.187	0.246	Dia. D
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	Dia. C max
d1 - max	0.172	0.225	0.279	0.332	0.385	0.385	0.507	d1 - max
k - max	0.051	0.067	0.083	0.100	0.116	0.116	0.153	k - max
Recess	1	1	2	2	2	2	3	Recess
L - Length ins	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttucwzpanzc</p>							L - Length ins
3/16	●	●	●					3/16
1/4	●	●	●		●			1/4
5/16			●					5/16
3/8			●	●	●			3/8
7/16			●					7/16
1/2		●		●	●		●	1/2
9/16								9/16
5/8		●	●	●	●		●	5/8
3/4			●		●		●	3/4
7/8								7/8
1							●	1
1 1/4					●			1 1/4
1 1/2							●	1 1/2
1 3/4								1 3/4
2								2
2 1/4								2 1/4
2 1/2								2 1/2

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTUCWZPAN42160ZC

PRODUCT DESCRIPTION EXAMPLE
8.32 UNC x 5/8 Cross Recess (Z) Pan Unified Tap-Fix® Screw Steel / Zinc Plated (CR3)



Screws for Plastics
 ISO & DIN 7500 Tap-Fix® Screws
 Machine Screws
 Self-Tapping Screws
 Self-Drilling Screws
 Micro Diameter Screws
 Hammer Drive Screws
 K-Series® Setzmuttern
 Rivet Bushes
 Self-Clinching Fasteners
 CD Weld Studs
 Brass Inserts for Plastics

UNIFIED Tap-Fix® Screws


Thread Rolling Screws for Metal Applications

Cross Recess (Z) Countersunk ANSI B18.6.4

Steel / Zinc Plated (CR3)

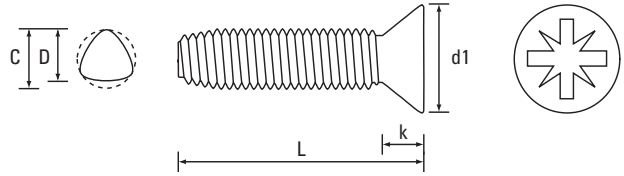

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	1/4" - 20 UNC	Dia.
Dia. D	0.084	1.109	0.135	0.161	0.185	0.187	0.246	Dia. D
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	Dia. C max
d1 - max	0.172	0.225	0.279	0.332	0.385	0.385	0.507	d1 - max
k - ref	0.051	0.067	0.083	0.100	0.116	0.116	0.153	k - ref
Recess	1	1	2	2	2	2	3	Recess

L - Length ins	 Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttucwzcskzc							L - Length ins
3/16								3/16
1/4	●							1/4
5/16		●						5/16
3/8	●	●						3/8
7/16								7/16
1/2								1/2
9/16								9/16
5/8								5/8
3/4			●	●			●	3/4
7/8								7/8
1							●	1
1 1/4							●	1 1/4
1 1/2							●	1 1/2
1 3/4							●	1 3/4
2							●	2
2 1/4							●	2 1/4
2 1/2							●	2 1/2


● Steel / Zinc Plated (CR3) - preferred and available from stock.


PRODUCT CODE EXAMPLE
TTUCWZCSK42190ZC

PRODUCT DESCRIPTION EXAMPLE
8.32 UNC x 3/4 Cross Recess (Z) Countersunk Unified Tap-Fix® Screw Steel / Zinc Plated (CR3)

Washer Hexagon ANSI B18.6.4

Steel / Zinc Plated (CR3)

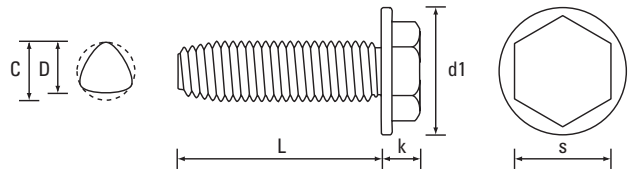

Dia.	2.56 UNC	4.40 UNC	6.32 UNC	8.32 UNC	10.24 UNC	10.32 UNF	1/4" - 20 UNC	Dia.
Dia. D	0.084	1.109	0.135	0.161	0.185	0.187	0.246	Dia. D
Dia. C max	0.0875	0.1145	0.141	0.167	0.194	0.193	0.255	Dia. C max
d1 - max	0.166	0.243	0.328	0.348	0.414	0.414	0.520	d1 - max
k - max	0.066	0.079	0.118	0.141	0.151	0.151	0.240	k - max
s - A/F max	0.125	0.188	0.250	0.250	0.312	0.312	0.375	s - A/F max
L - Length ins	 <p>Scan the QR Code to view technical drawings for this product range https://www.lancasterfastener.com/drawings-for-ttucwwhxzc</p>							L - Length ins
3/16								3/16
1/4				●				1/4
5/16								5/16
3/8			●	●	●			3/8
7/16								7/16
1/2				●	●	●	●	1/2
9/16								9/16
5/8				●			●	5/8
3/4							●	3/4
7/8								7/8
1							●	1
1 1/4							●	1 1/4
1 1/2								1 1/2
1 3/4								1 3/4
2								2
2 1/4								2 1/4
2 1/2								2 1/2

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE
TTUCWWHX48130ZC

PRODUCT DESCRIPTION EXAMPLE
10.24 UNC x 1/2 Washer Hexagon Unified Tap-Fix® Screw Steel / Zinc Plated (CR3)