
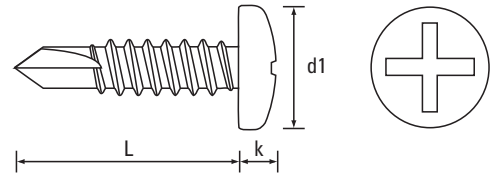


# Self-Drilling Screws

Screws for Sheet Metal Applications

Cross Recess (H) Pan DIN 7504 FORM N

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

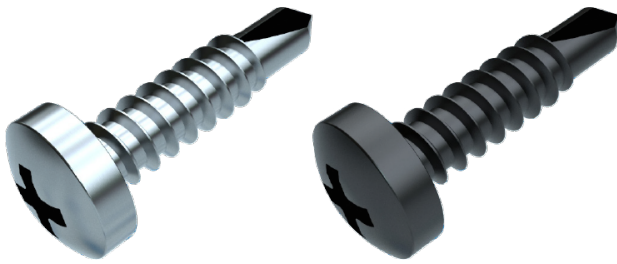

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	-	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdphpanzc>

L - Length mm									L - Length ins
6.5									1/4
9.5		●	● ●	● ●					3/8
13		●	●	● ●	● ●	●	●		1/2
16		●	●	● ●	● ●	●	●		5/8
19		●	●	●	● ●	● ●	●	●	3/4
22			●	●	●	●	●	●	7/8
25			●	●	● ●	● ●	●	●	1
32			● ●	●	●	●	●	●	1 1/4
38			●	●	● ●	●	●	●	1 1/2
45					●	●	●	●	1 3/4
50					●	●	●	●	2
60									2 1/2
70						●			2 3/4
75									3
80									3 1/4
90									3 1/2
100									4



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

DFDHPAN42190ZC  
 DFDHPAN48250ZN

**PRODUCT DESCRIPTION EXAMPLE**

4.2 x 19.0 Cross Recess (H) Pan DIN 7504 FORM N Self-Drilling Screw Steel / Zinc Plated (CR3)  
 4.8 x 25.0 Cross Recess (H) Pan DIN 7504 FORM N Self-Drilling Screw Steel / Black (CR3)

Screws for Plastics

ISO & DIN 7500 Tap-Fix® Screws

Machine Screws

Self-Tapping Screws

Self-Drilling Screws

Micro Diameter Screws

Hammer Drive Screws

K-Series® Setzmuttern

Rivet Bushes

Self-Clinching Fasteners

CD Weld Studs


Brass Inserts for Plastics

# Self-Drilling Screws


Screws for Sheet Metal Applications

Cross Recess (H) Pan DIN 7504 FORM M

A2 Stainless Steel

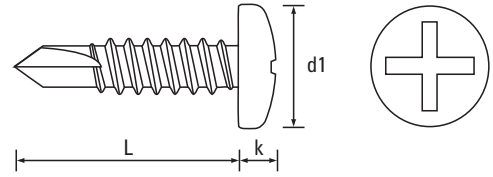

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	-	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	2	2	2	2	3	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ssdfdphpana2">https://www.lancasterfastener.com/drawings-for-ssdfdphpana2</a>								L - Length ins
6.5									1/4
9.5			●						3/8
13			●	●	●	●			1/2
16			●	●	●	●			5/8
19			●	●	●	●			3/4
22					●	●			7/8
25					●	●			1
32					●	●			1 1/4
38					●	●			1 1/2
45						●			1 3/4
50						●			2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
SSDFDPAN48190A2


PRODUCT DESCRIPTION EXAMPLE  
4.8 x 19.0 Cross Recess (H) Pan DIN 7504 FORM M Self-Drilling Screw A2 Stainless Steel

# Self-Drilling Screws

Screws for Sheet Metal Applications

Cross Recess (H) Countersunk DIN 7504 FORM P

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

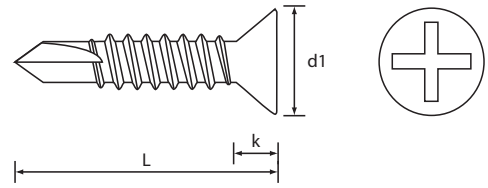

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	-	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdphcskzc>

L - Length mm										L - Length ins
6.5										1/4
9.5		●	●							3/8
13		●	●	●	●	●				1/2
16		●	●	●	● ●	●				5/8
19			●	●	●	●	●	●		3/4
22			●	●	●	●		●		7/8
25			●	●	● ●	●	●	●		1
32			●	●	● ●	● ●	●	●		1 1/4
38			●	●	● ●	● ●	●	●		1 1/2
45				●	●	●	●	●		1 3/4
50					●	●	●	●		2
60						●	●	●		2 1/2
70							●	●		2 3/4
75										3
80								●		3 1/4
90										3 1/2
100										4



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

DFDPHCSK29160ZC  
 DFDPHCSK48380ZN

**PRODUCT DESCRIPTION EXAMPLE**

2.9 x 16.0 Cross Recess (H) Countersunk DIN 7504 FORM P Self-Drilling Screw Steel / Zinc Plated (CR3)  
 4.8 x 38.0 Cross Recess (H) Countersunk DIN 7504 FORM P Self-Drilling Screw Steel / Black (CR3)

Screws for Plastics

ISO & DIN 7500 Tap-Fix® Screws

Machine Screws

Self-Tapping Screws

Self-Drilling Screws

Micro Diameter Screws

Hammer Drive Screws

K-Series® Setzmuttern

Rivet Bushes

Self-Dinching Fasteners

CD Weld Studs


Brass Inserts for Plastics

# Self-Drilling Screws

Screws for Sheet Metal Applications

Cross Recess (H) Countersunk DIN 7504 FORM O

A2 Stainless Steel

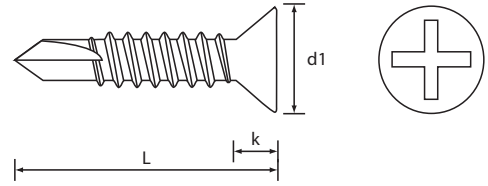

Dia. mm	2.2	2.9	3.5	3.9*	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.50	7.30	7.50	8.40	9.30	10.30	11.30	d1 - max
k - ref	-	1.70	2.35	2.30	2.60	3.80	3.00	3.15	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	2	2	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-ssdfdpchcska2>

L - Length mm									L - Length ins
6.5									1/4
9.5									3/8
13			●	●	●	●			1/2
16			●	●	●	●			5/8
19				●	●	●			3/4
22					●	●			7/8
25				●	●	●			1
32					●	●			1 1/4
38					●	●			1 1/2
45						●			1 3/4
50						●			2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● A2 Stainless Steel - preferred and available from stock.

PRODUCT CODE EXAMPLE  
SSDFDPHCSK48500A2



PRODUCT DESCRIPTION EXAMPLE  
4.8 x 50.0 Cross Recess (H) Countersunk DIN 7504 FORM O Self-Drilling Screw A2 Stainless Steel

# Self-Drilling Screws


Screws for Sheet Metal Applications

Washer Hexagon DIN 7504 FORM K

Steel / Zinc Plated (CR3)

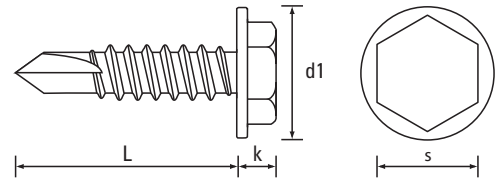

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	8.30	8.80	10.50	11.00	13.20	d1 - max
k - max	-	-	3.45	3.45	4.25	4.45	5.45	6.45	k - max
s - A/F max	-	-	5.50	5.50	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 <p>Scan the QR Code to view technical drawings for this product range  <a href="https://www.lancasterfastener.com/drawings-for-dfdpwhmzc">https://www.lancasterfastener.com/drawings-for-dfdpwhmzc</a></p>								L - Length ins
6.5									1/4
9.5			●	●	●				3/8
13			●	●	●	●			1/2
16			●	●	●	●	●	●	5/8
19			●	●	●	●	●	●	3/4
22			●		●	●	●	●	7/8
25			●	●	●	●	●	●	1
32					●	●	●	●	1 1/4
38					●	●	●	●	1 1/2
45						●	●	●	1 3/4
50						●	●	●	2
60						●	●	●	2 1/2
70							●	●	2 3/4
75								●	3
80							●	●	3 1/4
90								●	3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPWHM63190ZC

PRODUCT DESCRIPTION EXAMPLE  
6.3 x 19.0 Washer Hexagon DIN 7504 FORM K Self-Drilling Screw Steel / Zinc Plated (CR3)


Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Dinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Drilling Screws


Screws for Sheet Metal Applications

Washer Hexagon DIN 7504 FORM K (DIN 6928)

A2 Stainless Steel

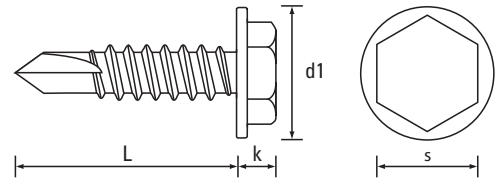

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	8.30	8.80	10.50	11.00	13.50	d1 - max
k - max	-	-	3.40	3.40	4.10	4.30	5.40	5.90	k - max
s - A/F max	-	-	5.50	5.50	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-ssdfpwhma2">https://www.lancasterfastener.com/drawings-for-ssdfpwhma2</a>								L - Length ins
6.5									1/4
9.5					●				3/8
13					●	●			1/2
16					●	●			5/8
19					●	●	●	●	3/4
22					●	●	●	●	7/8
25					●	●	●	●	1
32					●	●	●	●	1 1/4
38					●	●	●		1 1/2
45						●	●	●	1 3/4
50						●	●	●	2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● A2 Stainless Steel - preferred and available from stock.


PRODUCT CODE EXAMPLE	PRODUCT DESCRIPTION EXAMPLE
SSDFPWHM42250A2	4.2 x 25.0 Washer Hexagon DIN 7504 FORM K (DIN 6928) Self-Drilling Screw A2 Stainless Steel

# Self-Drilling Screws

Screws for Sheet Metal Applications

Cross Recess (H) Wafer Head DIN 7504 SIMILAR

Steel / Zinc Plated (CR3) & Steel / Black (CR3)

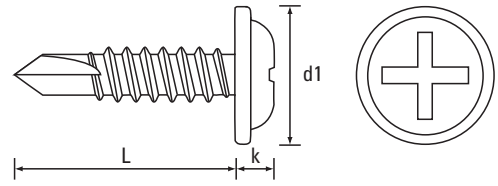

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	10.92	11.40	-	-	d1 - max
k - max	-	-	-	-	2.36	2.40	-	-	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	2	2	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdphflnzc>

L - Length mm									L - Length ins
6.5									1/4
9.5					● ●				3/8
13					● ●				1/2
16					● ●	● ●			5/8
19					● ●	● ●			3/4
22						●			7/8
25					● ●	● ●			1
32					● ●				1 1/4
38									1 1/2
45									1 3/4
50									2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4



Steel / Zinc Plated (CR3) - preferred and available from stock.



Steel / Black (CR3) - preferred and available from stock.

**PRODUCT CODE EXAMPLE**

DFDPHFLN42160ZC  
 DFDPHFLN48190ZN

**PRODUCT DESCRIPTION EXAMPLE**


4.2 x 16.0 Cross Recess (H) Wafer Head DIN 7504 SIMILAR Self-Drilling Screw Steel / Zinc Plated (CR3)  
 4.8 x 19.0 Cross Recess (H) Wafer Head DIN 7504 SIMILAR Self-Drilling Screw Steel / Black (CR3)

# Self-Drilling Screws


Screws for Sheet Metal Applications

Cross Recess (H) Raised Countersunk DIN 7504 FORM Q

Steel / Zinc Plated (CR3)

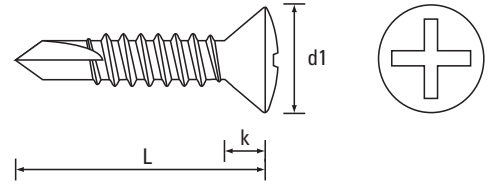

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	-	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	1	2	2	2	2	3	3	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-dfdphrsdzc">https://www.lancasterfastener.com/drawings-for-dfdphrsdzc</a>								L - Length ins
6.5									1/4
9.5									3/8
13									1/2
16									5/8
19			●	●	●				3/4
22									7/8
25			●	●	●	●			1
32									1 1/4
38									1 1/2
45									1 3/4
50									2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPHRSD48250ZC


PRODUCT DESCRIPTION EXAMPLE  
4.8 x 25.0 Cross Recess (H) Raised Countersunk DIN 7504 FORM Q Self-Drilling Screw Steel / Zinc Plated (CR3)

# Self-Drilling Screws


Screws for Sheet Metal Applications

Slotted Washer Hexagon DIN 7504 FORM L

Steel / Zinc Plated (CR3)

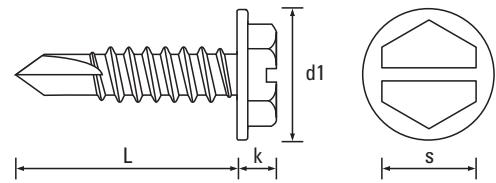

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	8.30	8.30	8.80	10.50	11.00	13.20	d1 - max
k - max	-	-	3.45	3.45	4.25	4.45	5.45	6.45	k - max
s - A/F max	-	-	5.50	5.50	7.00	8.00	8.00	10.00	s - A/F max
Recess	-	-	-	-	-	-	-	-	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-dfdpslwhmzc">https://www.lancasterfastener.com/drawings-for-dfdpslwhmzc</a>								L - Length ins
6.5									1/4
9.5									3/8
13			●		●				1/2
16					●	●			5/8
19					●	●			3/4
22									7/8
25						●			1
32					●				1 1/4
38									1 1/2
45									1 3/4
50									2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPSLWHM35130ZC

PRODUCT DESCRIPTION EXAMPLE  
3.5 x 13.0 Slotted Washer Hexagon DIN 7504 FORM L Self-Drilling Screw Steel / Zinc Plated (CR3)



Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Drilling Screws

Screws for Sheet Metal Applications

Square Drive Pan FORM N SIMILAR

Steel / Zinc Plated (CR3)

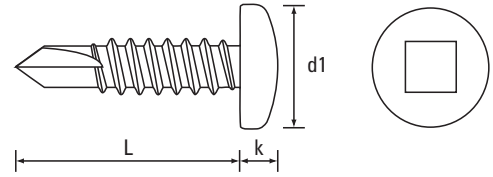

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	-	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	1	2	2	2	-	-	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdpsqpanzc>

L - Length mm									L - Length ins
6.5									1/4
9.5			●						3/8
13			●	●	●	●			1/2
16			●	●	●	●			5/8
19			●	●	●	●			3/4
22									7/8
25					●	●			1
32					●				1 1/4
38					●	●			1 1/2
45									1 3/4
50					●				2
60									2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPSQPAN48250ZC



PRODUCT DESCRIPTION EXAMPLE  
4.8 x 25.0 Square Drive Pan DIN 7504 FORM N SIMILAR Self-Drilling Screw Steel / Zinc Plated (CR3)

# Self-Drilling Screws


Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Pan DIN 7504 FORM N SIMILAR

Steel / Zinc Plated (CR3)

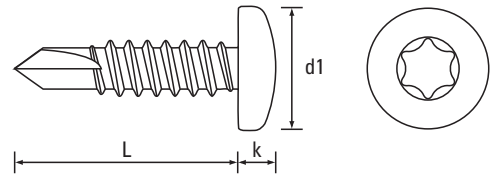

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.60	6.90	7.50	8.20	9.50	10.80	12.50	d1 - max
k - max	-	2.20	2.60	2.80	3.05	3.55	3.95	4.55	k - max
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T10	T15	T15	T20	T25	T27	T30	Recess

L - Length mm	 Scan the QR Code to view technical drawings for this product range <a href="https://www.lancasterfastener.com/drawings-for-dfdptxpanzc">https://www.lancasterfastener.com/drawings-for-dfdptxpanzc</a>								L - Length ins
6.5									1/4
9.5		●	●						3/8
13		●	●	●	●	●			1/2
16		●	●	●	●	●			5/8
19		●	●	●	●	●	●	●	3/4
22					●	●			7/8
25				●	●	●	●		1
32				●	●	●	●		1 1/4
38					●	●	●		1 1/2
45						●	●		1 3/4
50					●	●	●		2
60						●			2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPTXPAN48190ZC

PRODUCT DESCRIPTION EXAMPLE  
4.8 x 19.0 T-Drive® (6-Lobe) Pan DIN 7504 FORM N SIMILAR Self-Drilling Screw Steel / Zinc Plated (CR3)


Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics

# Self-Drilling Screws

Screws for Sheet Metal Applications

T-Drive® (6-Lobe) Countersunk DIN 7504 FORM P SIMILAR

Steel / Zinc Plated (CR3)

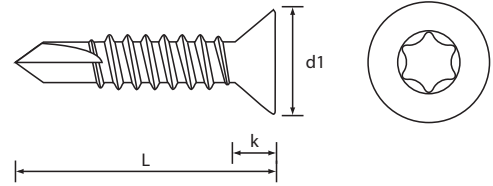

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	5.50	6.80	7.50	8.10	9.50	10.80	12.40	d1 - max
k - ref	-	1.70	2.10	2.30	2.50	3.00	3.40	3.80	k - ref
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	T10	T15	T15	T20	T25	T27	T30	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdptxcskzc>

L - Length mm									L - Length ins
6.5									1/4
9.5									3/8
13									1/2
16					●				5/8
19				●	●				3/4
22									7/8
25				●	●	●			1
32				●	●	●			1 1/4
38					●	●		●	1 1/2
45						●			1 3/4
50						●	●	●	2
60								●	2 1/2
70									2 3/4
75									3
80									3 1/4
90									3 1/2
100									4

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDPTXCSK39190ZC


PRODUCT DESCRIPTION EXAMPLE  
3.9 x 19.0 T-Drive® (6-Lobe) Countersunk DIN 7504 FORM P SIMILAR Self-Drilling Screw Steel / Zinc Plated (CR3)

# Self-Drilling Screws

Screws for Wood to Steel Applications

Cross Recess (H) Ribbed Countersunk with Wings

Steel / Zinc Plated (CR3)

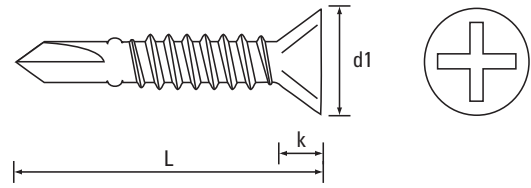

Dia. mm	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3	Dia. mm
Dia. Gauge	2	4	6	7	8	10	12	14	Dia. Gauge
d1 - max	-	-	-	-	8.10	9.50	10.80	12.40	d1 - max
k - nom	-	-	-	-	2.50	3.00	3.40	3.80	k - nom
s - A/F	-	-	-	-	-	-	-	-	s - A/F
Recess	-	-	-	-	2	2	3	3	Recess



Scan the QR Code to view technical drawings for this product range  
<https://www.lancasterfastener.com/drawings-for-dfdp3pthcskzc>

L - Length mm									L - Length mm
6.5									6.5
9.5									9.5
13									13
16									16
19									19
22									22
25									25
32					●	●			32
38					●	●	●		38
45							●		45
50					●	●	●	●	50
55							●	●	55
60							●		60
70								●	70
80									80
90								●	90
100									100

● Steel / Zinc Plated (CR3) - preferred and available from stock.

PRODUCT CODE EXAMPLE  
DFDP3PTHCSK6390ZC

PRODUCT DESCRIPTION EXAMPLE  
6.3 x 90.0 Cross Recess (H) Ribbed Countersunk Self-Drilling Screw Steel / Zinc Plated (CR3)

Screws for Plastics  
ISO & DIN 7500 Tap-Fix® Screws  
Machine Screws  
Self-Tapping Screws  
Self-Drilling Screws  
Micro Diameter Screws  
Hammer Drive Screws  
K-Series® Setzmuttern  
Rivet Bushes  
Self-Clinching Fasteners  
CD Weld Studs  
Brass Inserts for Plastics